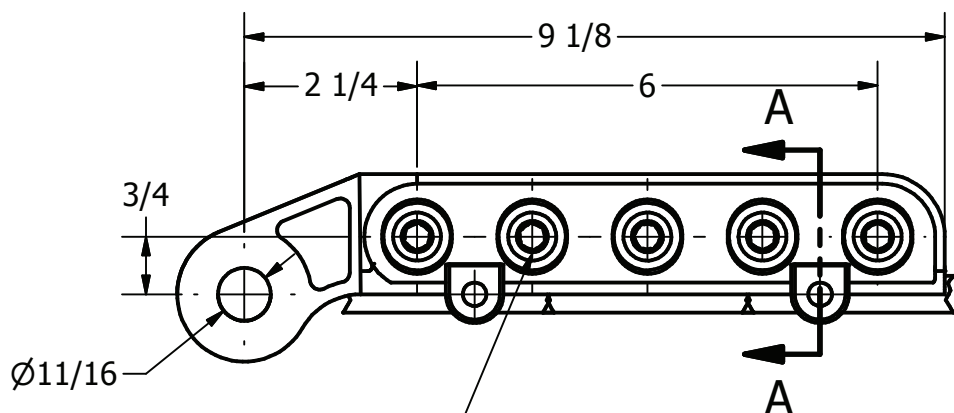
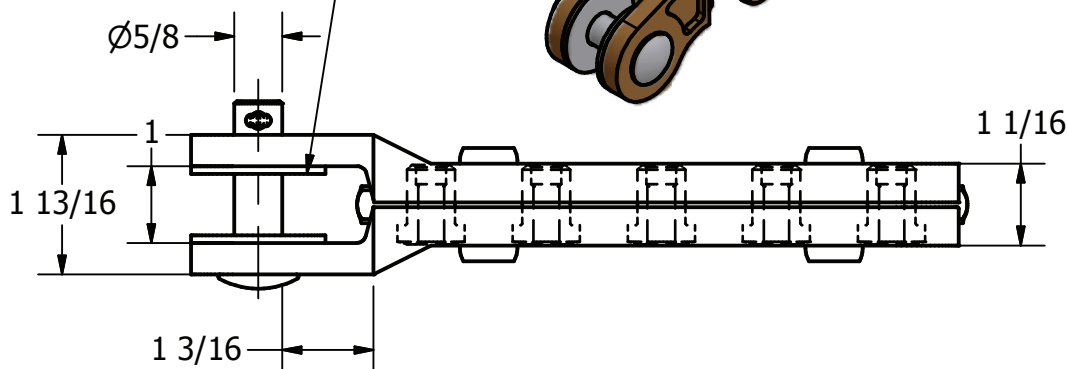



ITEM NO

DWG NO
B-67532X FLAT WASHER
EVERDUR (OPTION)

SECTION A-A

STUD, 5/8-18NF-2A, ST STL
(SCAT-63-SS)4/0 TO 300 MCM AND 350 MCM
GROOVED TROLLEY WIRE**MATERIAL:**ALUMINUM BRONZE ASTM B30.
CLEVIS PIN-GALVANIZED STEEL
COTTER KEY-STAINLESS STEEL

TORQUE STUD 45 FT-LBS

3.53 LBS

NOTE:THE DEAD END CLAMP IS DESIGNED TO
WITHSTAND, WITHOUT DEFORMATION OR
SLIPPAGE OF CONTACT WIRE 10,340 LBS
OF PULLING FORCE (90% OF BREAKING
STRENGTH OF 4/0 MCM BRONZE TROLLEY
WIRE)

LOCATION

CONTRACT NO

CUST / CONTR

REVISIONS

REV	DESCRIPTION	DATE	BY	APR
6	RE-DRAWN IN INVENTOR	1-18-10	LK	EP

DRN BY:
KB
DRN DATE:
2-2-95
CHK BY:
HJ
CHK DATE:
6-19-85**AFL****DOSSERT®**

CLAMP, DEAD END CLEVIS

REV
6

DEFS34T

1 OF 1

THIS DRAWING AND ALL INFORMATION ON IT IS THE PROPERTY OF AFL. IT IS CONFIDENTIAL AND IT IS GIVEN TO YOU FOR A LIMITED PURPOSE AND MUST BE RETURNED UPON REQUEST. NEITHER THIS DRAWING OR ANY PART OF IT NOR ANY INFORMATION CONCERNING IT MAY BE COPIED, EXHIBITED, OR FURNISHED TO OTHERS NOR PHOTOGRAPHS TAKEN OF ANY ARTICLE FABRICATED OR ASSEMBLED FROM THE DRAWING WITHOUT THE CONSENT OF AFL.