

Fujikura 100R Fusion Splicer

The Fujikura 100R mass fusion splicer introduces Intelligent Alignment Control to deliver more reliable, uniform splices by automatically correcting fiber placement, end-face gaps, and axis alignment across all fibers.

Intelligent Alignment Control in the 100R enhances splice reliability by automatically correcting improper fiber seating, minimizing end-face gap variation, and stabilizing fiber-axis alignment across all fibers. Adjustable control levels allow the system to balance precision and cycle time, ensuring the best splice results across broadband or hyperscale applications.

Auto Placement Correction automatically detects and corrects fibers that are improperly seated in the V-groove prior to fusion. By automatically lifting the clamp and adjusting the Z-stage as needed, the system ensures proper fiber placement, reducing splice variability, and minimizing manual intervention.

Gap Alignment Correction automatically reduces variation in endface gaps across fibers prior to fusion. By continuously adjusting alignment until the target range is met, the 100R improves splice uniformity and consistency while completing the correction in as little as one second.

Axis Offset Correction reduces fiber axis position offsets across all fibers prior to fusion. By performing controlled, automatic alignment adjustments, the 100R improves splice uniformity and consistency while applying corrections only as needed to maintain efficient cycle times.

With the Fujikura 100R, you can keep your splicer in the field longer thanks to the included, field-replaceable V-grooves. With the AFL Tote Solution installed, the 100R transit case securely integrates with Milwaukee's PACKOUT™ system, offering faster transport, stability, and time savings for contractors and technicians.

Put our 100R to the test by contacting us to see its capabilities first-hand, 1-800-235-3423.

Features

- Intelligent Alignment Controls for hands-free alignment
- Auto Placement Correction for proper fiber seating
- Gap Alignment Correction for uniform endface gaps
- Axis Offset Correction for consistent fiber alignment
- Clever tracking and upkeep with wireless communication
- Automated wind protector, tube heater and splice operation
- User replaceable V-grooves
- Graphical User Interface with 5.0" Touchscreen
- Multi-function transit case with integrated workstation


Applications

- Data Center cable installation
- High fiber count metro and campus networks
- Long-haul network installs and repairs
- Trunk cable repair with Splice-on MPOs
- Ribbon splicing high-density cables with 200 µm loose fiber




Fujikura 100R Fusion Splicer

Intelligent Alignment Control Features

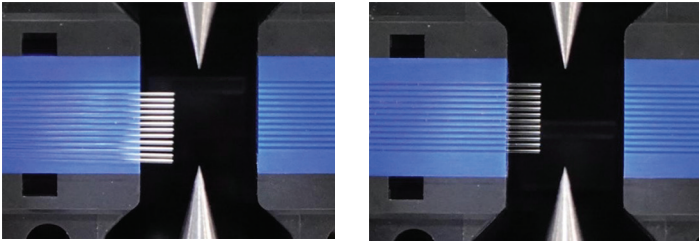

Auto Placement Correction
(before on left; after on right)

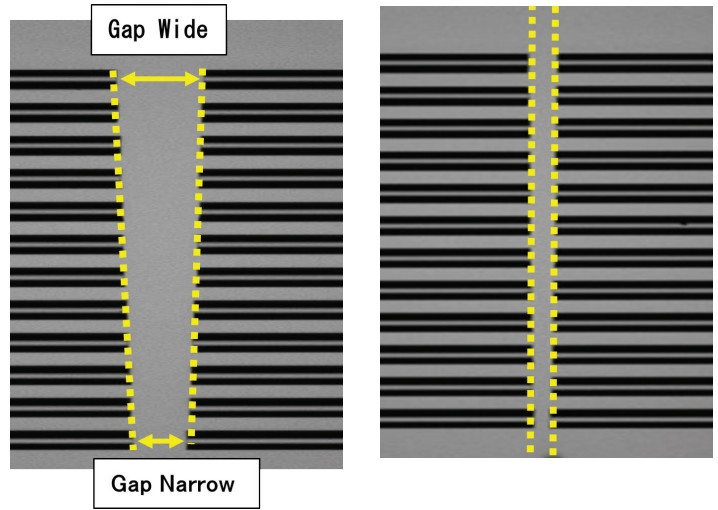

Gap Alignment Correction
(before on left; after on right)

Ordering Information

Description	AFL No.
Fujikura 100R SpliceReady Splicer Kit Includes: Fujikura 100R Standard Kit (S018665), FP-05 40 mm protection sleeve, Splicer V-groove cleaning kit, FH-80-12PC 200 to 250um Pitch Conversion Fiber Holder, AFL WFW wipes mini tub (90 wipes), FCC2 fiber cleaning fluid (3 oz.), RT-02 Ribbonizing tool	S018713
Fujikura 100R with 200 μm Accessories SpliceReady Kit Includes: Fujikura 100R Standard Kit (S018665), FP-05 40 mm protection sleeve, VG12-02-200 200 μm V-groove, FH-80-16PC 200 to 250 μm Pitch Conversion Fiber Holder, FH-80-12-200 fiber holders, RT-02 Ribbonizing tool, Splicer V-groove cleaning kit, FCC2 fiber cleaning fluid (3 oz.), AFL WFW wipes mini tub (90 wipes)	S018714
Fujikura 100R Fusion Splicer Kit with CT60 and RS03 Includes: BTR-19 Battery, ADC-22 AC Adapter, ACC-19 AC Cord, CT60 Cleaver, RS03 Stripper with internal BTR-12A battery, ADC-09A AC Adapter with ACC-09 cord, ELCT2-16C Spare Electrodes (pair) with spare V-Grooves (VG12-02), FH-80-12 Fiber Holders (pair), USB-02 Cable, Alcohol Dispenser, Quick Reference Guide, TS-04A Splicer Tripod Screw, TS-04B Cleaver Tripod Screw, On-board Instructional Manual, CC-48 Transit Case, ST-02 Fusion Splicer Strap and Two-year Warranty	S018665
Fujikura 100R Fusion Splicer (machine only) Includes: BTR-19 Battery, ADC-22 AC Adapter, ACC-19 AC Cord, ELCT2-16C Spare Electrodes (pair) with spare V-Grooves (VG12-02), FH-80-12 Fiber Holders (pair), USB-02 Cable, Alcohol Dispenser, Quick Reference Guide, TS-04A Splicer Tripod Screw, TS-04B Cleaver Tripod Screw, On-board Instructional Manual, Work Tray, CC-48 Transit Case, and Two-year Warranty	S018710
Fujikura 100R Fusion Splicer Kit without Bluetooth with CT60 and RS01 Includes: BTR-19 Battery, ADC-22 AC Adapter, ACC-19 AC Cord, CT-60 Cleaver, RS01 Stripper, ADC-09A AC Adapter with ACC-09 cord, ELCT2-16C Spare Electrodes (pair) with spare V-Grooves (VG12-02), FH-80-12 Fiber Holders (pair), USB-02 Cable, Alcohol Dispenser, Quick Reference Guide, TS-04A Splicer Tripod Screw, TS-04B Cleaver Tripod Screw, On-board Instructional Manual, CC-48 Transit Case, ST-02 Fusion Splicer Strap and Two-year Warranty	S018712
Fujikura 100R Fusion Splicer without Bluetooth Includes: BTR-19 Battery, ADC-22 AC Adapter, ACC-19 AC Cord, ELCT2-16C Spare Electrodes (pair) with spare V-Grooves (VG12-02), FH-80-12 Fiber Holders (pair), USB-02 Cable, Alcohol Dispenser, Quick Reference Guide, TS-04A Splicer Tripod Screw, TS-04B Cleaver Tripod Screw, On-board Instructional Manual, CC-48 Transit Case, and Two-year Warranty	S018711
One-Year Extended Warranty	S012996
Two-Year Extended Warranty	S013000

Fujikura 100R Fusion Splicer

Recommended Products for the 100R

Description	AFL No.
Cleavers and Strippers	
CT-60 Cleaver	S018654
RS01 Thermal Stripper	S016815
RS02 Thermal Stripper	S016816
RS03 Thermal Stripper	S016817
Fiber Holders and V-Grooves	
FH-80-2 Fiber Holder	S018726
FH-80-4 Fiber Holder	S018727
FH-80-5 Fiber Holder	S018728
FH-80-6 Fiber Holder	S018729
FH-80-8 Fiber Holder	S018730
FH-80-9 Fiber Holder	S018731
FH-80-10 Fiber Holder	S018732
FH-80-12 Fiber Holder	S018733
FH-80-12-200 Fiber Holder	S018734
FH-80-12PC 200 to 250um Pitch Conversion Fiber Holder	S018735
FH-80-16 Fiber Holder	S018736
FH-80-16-200 Fiber Holder	S018737
FH-80-16PC 200 to 250um Pitch Conversion Fiber Holder	S018738
FH-70-250 (250 μm coated fiber)	S017111
FH-70-900 (900 μm jacketed fiber)	S017113
FH-70-160 (160 μm coated fiber)	S017095
FH-60-LT900 (Loose buffer 900 μm fiber)	S015181
VG16-02 16 Fiber/250 μm V-Groove	S018739
VG16-02-200 16 Fiber/200 μm V-Groove	S018740
VG12-02 12 Fiber/250 μm V-Groove	S018741
VG12-02-200 12 Fiber/200 μm V-Groove	S018742
VG08-02 8 Fiber/250 μm V-Groove	S018743
VG04-02 4 Fiber/250 μm V-Groove	S018744
FUSEConnect® Accessories	
FH-FC-20 (900 μm within 2.0 mm sheathing) (each)	S014696
FH-FC-30 (900 μm within 3.0 mm sheathing) (pair)	S014695
FH-FC-900 (900 μm cable) (each)	S014697
CLAMP-FC-2000 (pair)	S014705

Description	AFL No.
Batteries and Power Cords	
ADC-22 AC Adapter	S018666
BTR-19 Battery	S018670
DCC-11 splicer to ribbon stripper power cord	S013852
DCC-20 Power Cord	S017527
Connects ADC-20 to cigarette lighter socket	
DCC-21 Power Cord	S017528
Connects ADC-20 to power source via alligator clips	
ACC-14 AC Power Cord	S014536
Miscellaneous	
SS01 Single fiber stripper (1 hole)	S017099
ELCT2-16C Electrodes	S018669
Portable Splicing Worktray (see product profile for more detail)	S014773
ASW-02 Splicing Workstation (see product profile for more detail)	S010532
WT-11R Work Tray Right	S018674
WT-11L Work Tray Left	S018673
JP-12 Work Tray J-Plate (Splicer Mount)	S018681
JP-11 J-Plate (Cooling tray attaches to splicer)	S018675
TS-04B Cleaver Tripod Screw	S018691
TS-04A Splicer Tripod Screw (90 Series)	S018677
ST-02 Fusion Splicer Strap	S017525
CLAMP-DC-12 (Drop Cable clamp on work tray)	S017550
FST-12 Fiber Separation Tool	S014012
FAT-04 Fiber Arrangement Tool	S010212
RT-02 Fiber Arrangement Tool	S017465
FAA-03A Ribbon Forming Adhesive (4 oz. bottle)	S008720
FAA-03A Ribbon Forming Adhesive (0.5 liter bottle)	S008622
CC-48 Transit Case	S018672
Splicer V-groove Cleaning Kit	S014397
ST-03 Case and Work Tray Strap	S017549
AFL Tote Solution - Cleat Installation Service	S018623



Fujikura 100R Fusion Splicer Kit with CT60 and RS03 (S018665)

Fujikura 100R Fusion Splicer

Specifications

Parameter		Value	
Fiber Alignment Method		Self-Cladding alignment with Surface Melting Tension	
Fiber Count Can Be Spliced		Single and up to 16 Fiber Ribbon with Applicable V-groove	
Applicable Fiber	Fiber Type	Single-mode Fiber Multimode Fiber	
	Cladding Diameter	Approx. 125 μ m	
Applicable Coating	Fiber Holder	Coating Shape: Refer to Options Cleave Length: Approx. 10 mm	
Fiber Splice Performance	Splice Loss	ITU-T G.652: Avg 0.05 db	
		ITU-T G.651: Avg 0.02 db	
		ITU-T G.653: Avg 0.08 db	
		ITU-T G.655: Avg 0.08 db	
Splice Time	ITU-T G.657: Avg 0.08 db		
	SM Fast Mode: Avg 16 to 18 Seconds SM Auto Mode: Avg 19 to 21 Seconds		
Applicable Protection Sleeve	Sleeve Type	Heat Shrinkable Sleeve	
	Sleeve Length	Max. 66 mm	
	Sleeve Diameter	Max. 6.0 mm before Shrink	
Sleeve Heat Performance	Heat Time	40 mm FP-05 Mode: Avg 33 to 40 Seconds	
		40 mm FP-04T Fast Mode: Avg 19 to 26 seconds	
		Single 60 mm Mode: Avg. 8 to 15 Seconds	
Fiber Tensile Test Force		Approx. 2.0 N	
Electrode Life		Approx. 1,500 Splices	
Physical Description	Dimensions W	157 mm	
	Dimensions D	178 mm	
	Dimensions H	171 mm	
	Weight	2.6 kg including Battery	
Environmental Condition	Temperature	Operate: -10 to +50°C Storage: -40 to +80°C	
		Humidity	Operate: 0 to 95% RH non-condensing Storage: 0 to 95% RH non-condensing
	Altitude	Max. 3,700 m	
AC Adapter	Input	AC100 to 240V, 50/60Hz, Max. 1.5A	
	Output	Approx. DC 12V, max. 7A	
Battery Pack	Type	Rechargeable Lithium Ion	
	Output	Approximately DC 12 V, Max 5A	
	Capacity	Approximately 165 Splices with Heat Shrink	
	Temperature	Operate: -10 to +50°C Recharge: 0 to +40°C Storage < One (1) Year: -20 to +20°C Storage < Three (3) Months: -20 to +40°C Storage < One (1) Month: -20 to +50°C	
		Recharge Time	≤ Six (6) Hours from Empty
		Battery Life	Approximately 500 Recharge Cycles
Display	LCD Monitor	TFT 4.95 inch Tough Screen	
	Magnification	Approx. 30x: 12-Fiber Ribbon Approx. 90x: Single Fiber	
Illumination	V-Grooves	LED Lamp	
Data Storage	Splice Mode	100 splice modes	
	Heat Mode	30 heat modes	
	Splice Result	20,000 splices	
	Splice Image	100 images	

Fujikura 100R Fusion Splicer

Specifications (cont.)

Parameter		Value
Other Features	Automatic Functions	Splice-mode Select by Fiber Count Analysis
		Fusion Power Calibration
		Fully Automatic Cleaver Blade Management
		Wind Protector: Open and Close
		Clamp: Auto Clamping Force Adjustment
		Z-Holder Base: Auto Placement Correction
		Z-Holder Base: Gap Alignment Correction
		Splice Start
		Heater Lid: Open and Close
		Heater Clamp: Open and Close
	Heater Start	
	Reference Guide	Video and PDF Store on Splicer
	Electrode	Replaceable without Tool
	Software for PC	Splicer Update via Internet
		Parameter Upload and Download Operating Splicer with PC Splice Image Download to PC
GPS	Splice Location Recorded to Memory	
	GEO Fencing	
Screw Hole for Tripod	1/4-20 UNC	