

DOSSERT® TYPE CP-V-AA

Pipe-to-Pipe Coupler

Joins two pipes of the same size together corona free up to 500 kV.

Material



Aluminum Alloy

Hardware

Yellow anodized aluminum nuts, bolts, and lockwashers.

Notes

- For Grade Five Galvanized Steel Hardware add "-GS5" to catalog number.
EX: CP400-V-AA-GS5
- For Stainless Steel bolts, lockwashers and Everdur nuts add "-SSHBN" to catalog number. EX:
CP400-V-AASSHBN

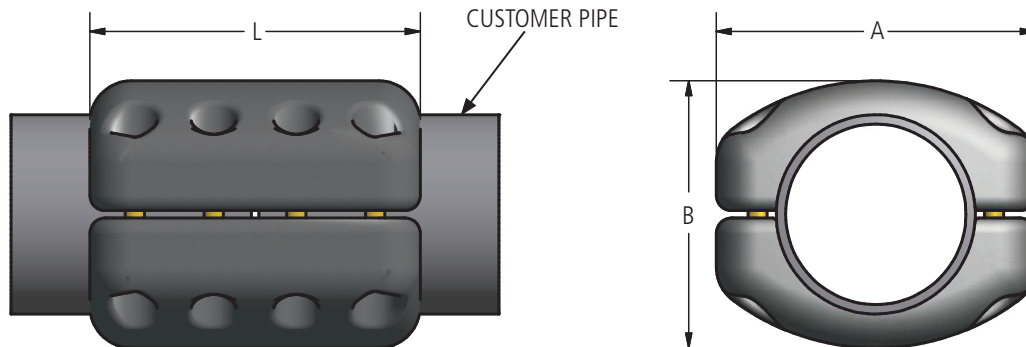

Ordering Information

CATALOG NUMBER	SPS	DIMENSIONS IN INCHES			BOLT SIZE	NUMBER BOLTS
		A	B	L		
CP250-V-AA	2 1/2	5 3/4	4 7/8	8 1/4	1/2	8
CP300-V-AA	3	7 3/8	5 1/8	10 1/4	5/8	8
CP350-V-AA	3 1/2	7 7/8	6 1/8	10 1/4	5/8	8
CP400-V-AA	4	8 3/8	6 5/8	12 1/4	5/8	8
CP500-V-AA	5	9 3/8	7 7/8	16 1/4	5/8	12
CP600-V-AA	6	10 5/8	8 7/8	11	5/8	8
CP800R-V-AA	8" OD	12	11 1/8	18 1/4	5/8	12
CP800-V-AA	8	11 7/8	10 7/8	18 1/4	5/8	12

DOSSERT[®] TYPE CPV-V-AA

Variable Angle Pipe Coupler


Pipe coupler is designed to be corona free for 345 kV and 500 kV service. Coupler designed to change angle to the installers suit.

Material


Aluminum Alloy

Hardware

Yellow anodized aluminum bolts, nuts, and lockwashers.

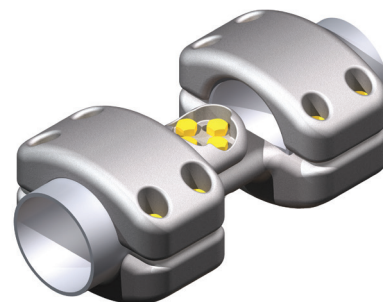

345/500 kV Couplers

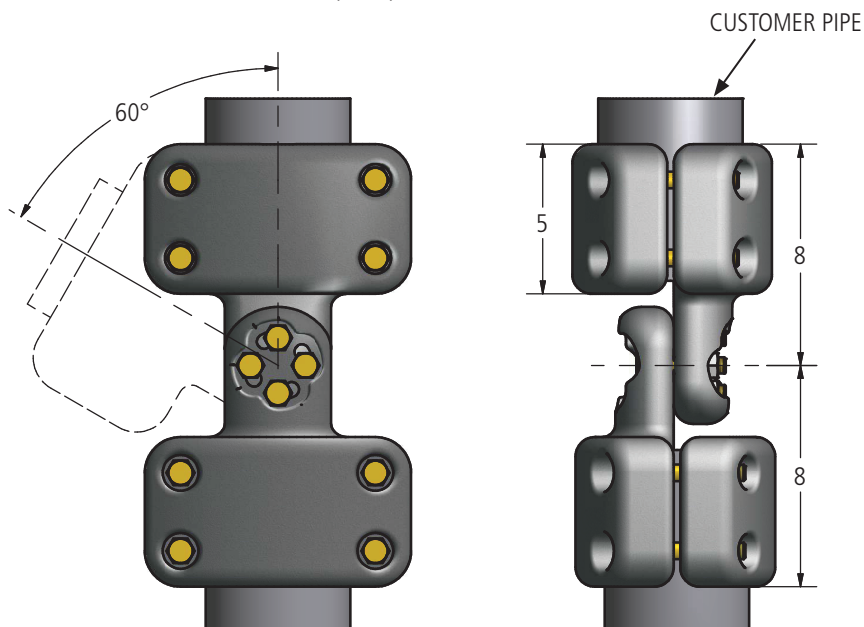

Ordering Information

CATALOG NUMBER	SPS	NOMINAL WEIGHT LBS
CPV400-V-AA	4	26
CPV500-V-AA	5	47
CPV600-V-AA	6	54