

DOSSERT®

TYPE GH

Ground Connector For Cable To Large Diameter Pipe



A ground connector for connecting a cable or wire to a large diameter pipe, tubular column or fence post. Each connector size accommodates a wide range of pipe sizes as well as cable sizes.

Material

Copper Alloy

Hardware

Everdur U-bolts, nuts and lockwashers

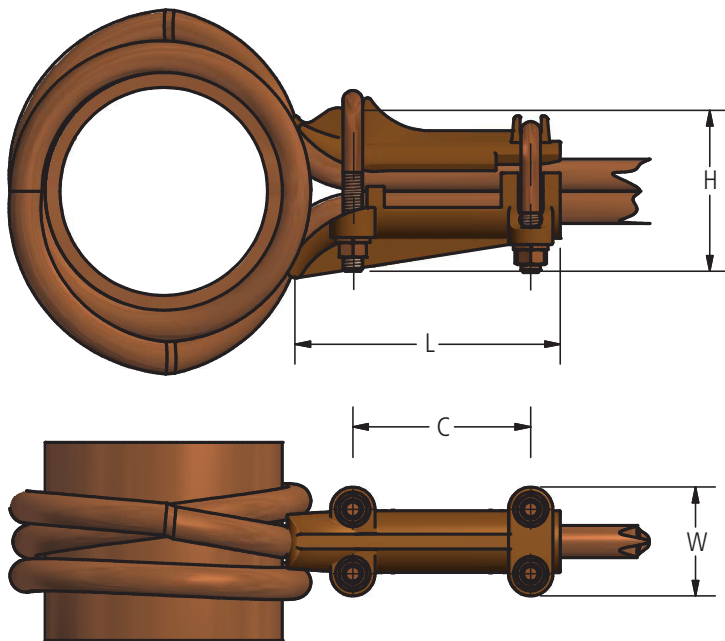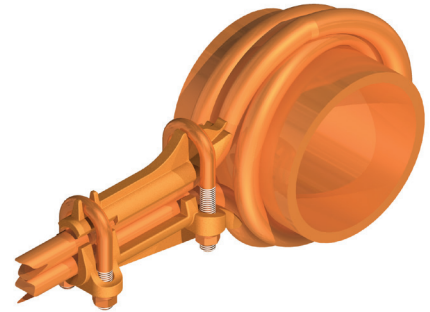

Ordering Information

CATALOG NUMBER	GROUNDING		GROUNDING PIPE SPS	DIMENSIONS IN INCHES				BOLT SIZE
	MIN	MAX		C	H	L	W	
GH13	4 Stranded	2/0 Stranded	6	3	4 7/16	5 1/4	2 7/16	1/2
GH13-S	4 Stranded	2/0 Stranded	Above 6	3	7	5 1/4	2 7/16	1/2
GH25	2/0 Stranded	250 MCM	6	4	4 1/8	6 1/4	2 3/4	1/2
GH25-S	2/0 Stranded	250 MCM	Above 6	4	7 1/2	6 1/4	2 3/4	1/2
GH50	300 MCM	500 MCM	6	4 1/2	4 7/8	6 3/4	2 3/4	1/2
GH50-S	300 MCM	500 MCM	Above 6	4 1/2	9	6 3/4	2 3/4	1/2

DOSSERT®

TYPE GK

Ground Clamp For 3 Cables To Fence Post

A ground connector for grounding three equal size cables at right angles to a grounding pipe or rod. Use of highly corrosion resistant materials allows the connector to be buried in the ground after connection is made. Finds wide application in the grounding of fences and structural members about a substation.

Material




Copper Alloy

Note

For tin plating add suffix (SN) to catalog number. Example: GK25-4-SN

Hardware

Everdur bolts, nuts and lockwashers

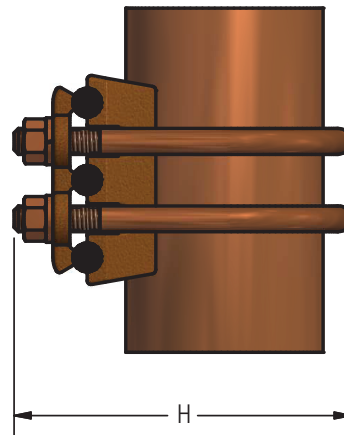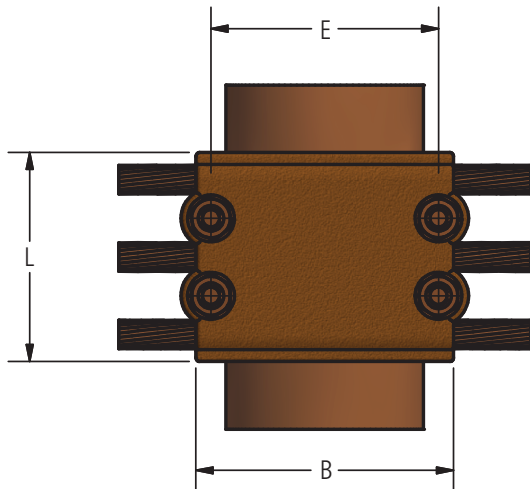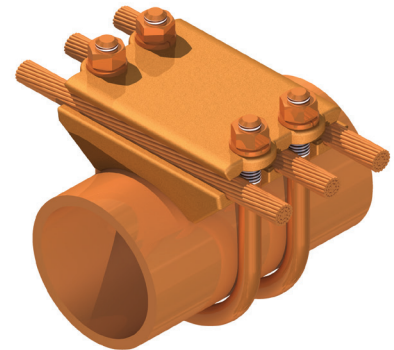

DOSSERT®

TYPE GK

Ground Clamp For 3 Cables To Fence Post

Ordering Information

CATALOG NUMBER	GROUNDING		CABLE RANGE		DIMENSIONS IN INCHES				BOLT SIZE
	PIPE SPS	ROD	MIN	MAX	B	E	H	L	
GK25-4	1/4	1/2	8 Solid	#4 Stranded	1 5/8	1	2 1/16	2 1/2	3/8
GK25-13	1/4	1/2	4 Solid	2/0 Stranded	1 5/8	1	2 3/16	3 1/16	3/8
GK25-25	1/4	1/2	2/0 Solid	250 MCM	1 3/4	1 1/8	2 1/2	3 3/4	1/2
GK38-4	3/8	5/8 or 3/4	8 Solid	#4 Stranded	1 3/4	1 3/16	2 1/4	2 1/2	3/8
GK38-13	3/8	5/8 or 3/4	4 Solid	2/0 Stranded	1 3/4	1 3/16	2 3/8	3 1/16	3/8
GK38-25	3/8	5/8 or 3/4	2/0 Solid	250 MCM	2	1 5/16	2 11/16	3 3/4	1/2
GK38-50	3/8	5/8 or 3/4	300 MCM	500 MCM	2	1 5/16	3 3/16	4 5/8	1/2
GK75-4	1/2 or 3/4	7/8 or 1	8 Solid	#4 Stranded	2 1/4	1 1/2	2 1/2	2 1/2	3/8
GK75-13	1/2 or 3/4	7/8 or 1	4 Solid	2/0 Stranded	2 1/4	1 1/2	2 5/8	3 1/16	3/8
GK75-25	1/2 or 3/4	7/8 or 1	2/0 Solid	250 MCM	2 1/2	1 5/8	2 15/16	3 3/4	1/2
GK75-50	1/2 or 3/4	7/8 or 1	300 MCM	500 MCM	2 1/2	1 5/8	3 1/2	4 5/8	1/2
GK100-4	1	-	8 Solid	#4 Stranded	2 1/2	1 3/4	2 3/4	2 1/2	3/8
GK100-13	1	-	4 Solid	2/0 Stranded	2 1/2	1 3/4	2 7/8	3 1/16	3/8
GK100-25	1	-	2/0 Solid	250 MCM	2 5/8	1 7/8	3 1/4	3 3/4	1/2
GK100-50	1	-	300 MCM	500 MCM	2 7/8	1 7/8	3 3/4	4 5/8	1/2
GK100-75	1	-	500 MCM	750 MCM	2 7/8	1 7/8	3 7/8	5 1/4	1/2
GK125-4	1 1/4	-	8 Solid	#4 Stranded	2 1/2	2 1/8	3 1/8	2 1/2	3/8
GK125-13	1 1/4	-	4 Solid	2/0 Stranded	2 5/8	2 1/8	3 1/4	3 1/16	3/8
GK125-25	1 1/4	-	2/0 Solid	250 MCM	2 5/8	2 1/4	3 5/8	3 3/4	1/2
GK125-50	1 1/4	-	300 MCM	500 MCM	3	2 1/4	4	4 5/8	1/2
GK125-75	1 1/4	-	500 MCM	750 MCM	3	2 1/4	4 3/4	5 1/4	1/2
GK150-4	1 1/2	-	8 Solid	#4 Stranded	3 1/8	2 3/8	3 3/8	2 1/2	3/8
GK150-13	1 1/2	-	4 Solid	2/0 Stranded	3 1/8	2 3/8	3 1/2	3 1/16	3/8
GK150-25	1 1/2	-	2/0 Solid	250 MCM	3 1/4	2 1/2	3 7/8	3 3/4	1/2
GK150-50	1 1/2	-	300 MCM	500 MCM	3 1/2	2 1/2	4 3/8	4 5/8	1/2
GK150-75	1 1/2	-	500 MCM	750 MCM	3 1/2	2 1/2	4 5/8	5 1/4	1/2
GK150-100	1 1/2	-	750 MCM	1000 MCM	3 9/16	2 1/2	4 3/4	6	1/2
GK200-4	2	-	8 Solid	#4 Stranded	3 7/8	2 13/16	3 7/8	2 1/2	3/8
GK200-13	2	-	4 Solid	2/0 Stranded	4	2 13/16	4 1/8	3 1/16	3/8
GK200-25	2	-	2/0 Solid	250 MCM	4	2 15/16	4 9/16	3 3/4	1/2
GK200-50	2	-	300 MCM	500 MCM	4	2 15/16	4 3/4	4 5/8	1/2
GK200-75	2	-	500 MCM	750 MCM	4 1/8	2 15/16	5 1/8	5 1/4	1/2
GK200-100	2	-	750 MCM	1000 MCM	4 1/4	2 15/16	5 3/8	6	1/2
GK250-4	-	2 1/2	8 Solid	#4 Stranded	4 1/4	3 5/16	4 1/2	2 1/2	3/8
GK250-13	-	2 1/2	4 Solid	2/0 Stranded	4 1/4	3 5/16	4 3/4	3 1/16	3/8
GK250-25	-	2 1/2	2/0 Solid	250 MCM	4 1/2	3 7/16	5 3/16	3 3/4	1/2
GK250-50	-	2 1/2	300 MCM	500 MCM	4 1/2	3 7/16	5 1/4	4 5/8	1/2
GK250-75	-	2 1/2	500 MCM	750 MCM	4 3/4	3 7/16	5 9/16	5 1/4	1/2
GK250-100	-	2 1/2	750 MCM	1000 MCM	4 3/4	3 7/16	5 7/8	6	1/2
GK300-4	-	3	8 Solid	#4 Stranded	5	4	5	2 1/2	3/8
GK300-13	-	3	4 Solid	2/0 Stranded	5	4	5 1/4	3 1/16	3/8
GK300-25	-	3	2/0 Solid	250 MCM	5	4 1/8	5 5/8	3 3/4	1/2
GK300-50	-	3	300 MCM	500 MCM	5 1/4	4 1/8	5 7/8	4 5/8	1/2
GK300-75	-	3	500 MCM	750 MCM	5 1/4	4 1/8	6 3/8	5 1/4	1/2
GK300-100	-	3	750 MCM	1000 MCM	5 1/4	4 1/8	6 11/16	6	1/2

DOSSERT®

TYPE GPC

Ground Clamp for Cable to Pipe in Parallel

A ground clamp for connecting a cable to a rod or pipe in a parallel or right angle position. Each position will accommodate a wide range of cable sizes. The cable can be placed in either clamping position without disassembly of clamp. Whole clamp is highly corrosion resistant.

Material




Copper Alloy

Hardware

Everdur U-bolts, nuts and lockwashers

Notes

- For O.D. pipe sizes to specified, add -R to catalog number, EX: GPC38R-4
- For tin plating, add suffix "-SN" to end of catalog number. EX: GPC38-4-SN
- For stainless steel bolts, lockwashers and Everdur nuts, add "-SSHBN" to catalog number. EX: GPC38-4-SSHBN
- All sizes are not shown, please contact customer service.

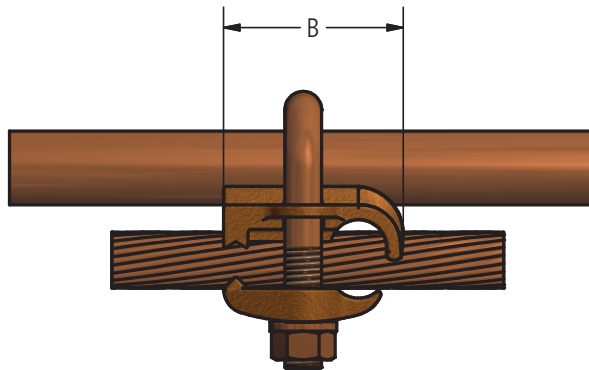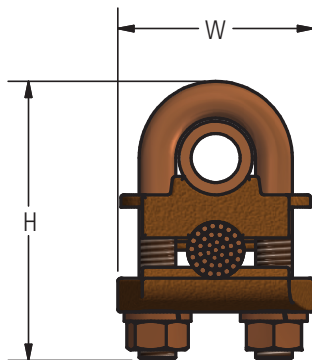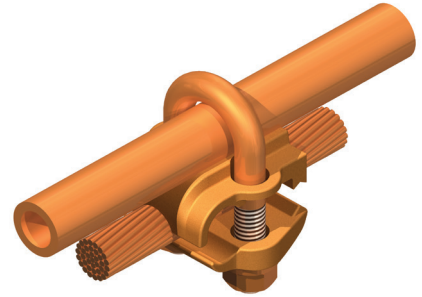

DOSSERT®

TYPE GPC

Ground Clamp for Cable to Pipe in Parallel

Ordering Information

CATALOG NUMBER	GROUNDING		CABLE RANGE		DIMENSIONS IN INCHES			BOLT SIZE
	PIPE SPS	ROD	MIN	MAX	B	H	W	
GPC25-4	1/4	1/2	8 Solid	4 Stranded	1.44	2.44	1.88	3/8
GPC25-13	1/4	1/2	4 Solid	2/0 Stranded	1.63	2.44	1.88	3/8
GPC25-25	1/4	1/2	2/0 Solid	250 MCM	1.88	2.50	1.88	3/8
GPC25-50	1/4	1/2	300 MCM	500 MCM	1.88	2.50	1.88	3/8
GPC38-4	3/8	5/8 or 3/4	8 Solid	4 Stranded	1.44	2.50	2.00	3/8
GPC38-13	3/8	5/8 or 3/4	4 Solid	2/0 Stranded	1.63	2.63	2.00	3/8
GPC38-25	3/8	5/8 or 3/4	2/0 Solid	250 MCM	1.88	2.75	2.00	3/8
GPC38-50	3/8	5/8 or 3/4	300 MCM	500 MCM	2.38	3.25	2.38	1/2
GPC75-4	1/2 or 3/4	7/8 or 1	8 Solid	4 Stranded	1.44	2.56	2.38	3/8
GPC75-13	1/2 or 3/4	7/8 or 1	4 Solid	2/0 Stranded	1.63	2.75	2.38	3/8
GPC75-25	1/2 or 3/4	7/8 or 1	2/0 Solid	250 MCM	1.88	2.88	2.38	3/8
GPC75-50	1/2 or 3/4	7/8 or 1	300 MCM	500 MCM	2.38	3.50	2.75	1/2
GPC100-4	1	1 1/8 - 1 1/4	8 Solid	4 Stranded	1.44	2.75	2.63	3/8
GPC100-13	1	1 1/8 - 1 1/4	4 Solid	2/0 Stranded	1.63	3.25	2.63	3/8
GPC100-25	1	1 1/8 - 1 1/4	2/0 Solid	250 MCM	1.88	3.25	2.63	3/8
GPC100-50	1	1 1/8 - 1 1/4	300 MCM	500 MCM	2.38	3.75	3.00	1/2
GPC125-4	1 1/4	1 3/8 - 1 5/8	8 Solid	4 Stranded	1.44	3.25	3.00	3/8
GPC125-13	1 1/4	1 3/8 - 1 5/8	4 Solid	2/0 Stranded	1.63	3.56	3.00	3/8
GPC125-25	1 1/4	1 3/8 - 1 5/8	2/0 Solid	250 MCM	1.88	3.63	3.00	3/8
GPC125-50	1 1/4	1 3/8 - 1 5/8	300 MCM	500 MCM	2.38	4.06	3 3/8	1/2
GPC150-4	1 1/2	1 5/8 - 1 7/8	8 Solid	4 Stranded	1.44	3.44	3.25	3/8
GPC150-13	1 1/2	1 5/8 - 1 7/8	4 Solid	2/0 Stranded	1.63	3.44	3.25	3/8
GPC150-25	1 1/2	1 5/8 - 1 7/8	2/0 Solid	250 MCM	1.88	4.00	3.25	3/8
GPC150-50	1 1/2	1 5/8 - 1 7/8	300 MCM	500 MCM	2.38	4.31	3.63	1/2
GPC200-4	2	2 - 2 1/2	8 Solid	4 Stranded	1.44	3.88	3.69	3/8
GPC200-13	2	2 - 2 1/2	4 Solid	2/0 Stranded	1.63	4.25	3.69	3/8
GPC200-25	2	2 - 2 1/2	2/0 Solid	250 MCM	1.88	4.44	3.69	3/8
GPC200R-25	-	2 1/2	2/0 Solid	250 MCM	1.88	4.44	3.69	3/8
GPC200-50	2	2 - 2 1/2	300 MCM	500 MCM	2.38	5.16	4.06	1/2
GPC250-4	2 1/2	2 5/8 - 2 7/8	8 Solid	4 Stranded	1.44	4.38	4.19	3/8
GPC250-13	2 1/2	2 5/8 - 2 7/8	4 Solid	2/0 Stranded	1.63	4.75	4.19	3/8
GPC250-25	2 1/2	2 5/8 - 2 7/8	2/0 Solid	250 MCM	1.88	4.88	4.19	3/8
GPC250R-25	-	2 1/2	2/0 Solid	250 MCM	1.88	4.88	4.19	3/8
GPC250-50	2 1/2	2 5/8 - 2 7/8	300 MCM	500 MCM	2.38	5.50	4.56	1/2
GPC300-4	3	3 1/4 - 3 1/2	8 Solid	4 Stranded	1.44	5.00	4.81	3/8
GPC300-13	3	3 1/4 - 3 1/2	4 Solid	2/0 Stranded	1.63	5.38	4.75	3/8
GPC300-25	3	3 1/4 - 3 1/2	2/0 Solid	250 MCM	1.81	5.50	4.75	3/8
GPC300R-25	-	3	2/0 Solid	250 MCM	1.88	5.50	4.31	3/8
GPC300-50	3	3 1/2	300 MCM	500 MCM	2.38	5.75	5.19	1/2
GPC350-4	3 1/2	3 3/4 - 4	8 Solid	4 Stranded	1.44	5.50	5.19	3/8
GPC350-13	3 1/2	3 3/4 - 4	4 Solid	2/0 Stranded	1.63	5.88	5.38	3/8
GPC350-25	3 1/2	3 3/4 - 4	2/0 Solid	250 MCM	1.88	6.00	5.31	3/8
GPC350-50	3 1/2	3 3/4 - 4	300 MCM	500 MCM	2.38	6.81	5.69	1/2
GPC400-4	4	4 1/4 - 4 1/2	8 Solid	4 Stranded	1.44	6.00	5.81	3/8
GPC400-13	4	4 1/4 - 4 1/2	4 Solid	2/0 Stranded	1.63	6.38	5.75	3/8
GPC400-25	4	4 1/4 - 4 1/2	2/0 Solid	250 MCM	1.81	6.50	5.75	3/8
GPC400R-25	-	4	2/0 Solid	250 MCM	1.88	6.00	5.31	3/8
GPC400-50	4	4 1/4 - 4 1/2	300 MCM	500 MCM	2.38	7.41	6.19	1/2
GPC600-50	6	6 5/8	300 MCM	500 MCM	2.38	9.77	8.31	1/2

DOSSERT®

TYPE GPF

Universal Ground Connector for Cable to Pipe

A universal ground connector for connecting a groundwire or cable to pipe. The rotatable feature of the conductor clamping element permits the positioning and clamping of the wire or cable at any angle through a full 360° arc.

Material



Copper Alloy

Hardware

Everdur bolts, lockwashers and nuts

Note

For tin plating, add suffix "-SN" to catalog number. Example: GPF250-13-SN

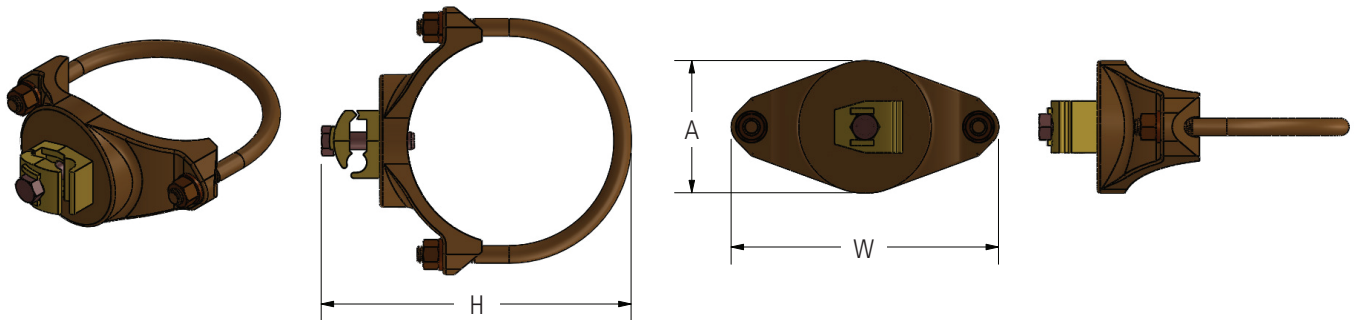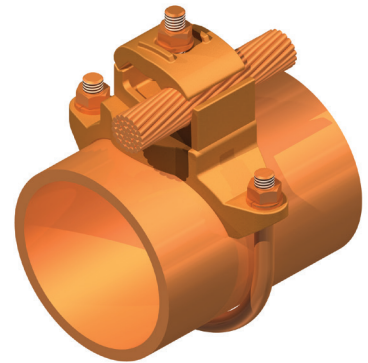

Ordering Information

CATALOG NUMBER	GROUND PIPE SPS	CABLE RANGE		DIMENSIONS IN INCHES			
		MIN	MAX	A	H	W	BOLT SIZE
GPF100-25	1	2/0 Solid	250 MCM	1.38	4.33	2.63	3/8
GPF200-25	2	2/0 Solid	250 MCM	2.00	5.38	3.69	3/8
GPF200-50	2	300 MCM	500 MCM	2.00	5.66	3.69	3/8
GPF250-4	2 1/2	8 Solid	4 Stranded	1.63	4.75	4.19	3/8
GPF250-13	2 1/2	4 Solid	2/0 Stranded	2.25	4.88	4.19	3/8
GPF250-25	2 1/2	2/0 Solid	250 MCM	2.25	5.25	4.19	3/8
GPF250-50	2 1/2	300 MCM	500 MCM	2.50	6.04	4.19	1/2
GPF300-4	3	8 Solid	4 Stranded	1.63	5.38	4.81	3/8
GPF300-13	3	4 Solid	2/0 Stranded	2.25	5.50	4.81	3/8
GPF300-25	3	2/0 Solid	250 MCM	2.25	5.75	4.81	3/8
GPF300-50	3	300 MCM	500 MCM	2.88	6.25	5.19	1/2
GPF350-4	3 1/2	8 Solid	4 Stranded	1.63	5.88	5.31	3/8
GPF350-13	3 1/2	4 Solid	2/0 Stranded	2.25	6.00	5.31	3/8
GPF350-25	3 1/2	2/0 Solid	250 MCM	2.50	6.60	5.31	3/8
GPF350-50	3 1/2	300 MCM	500 MCM	2.50	7.16	5.31	1/2
GPF400-4	4	8 Solid	4 Stranded	1.63	6.38	5.81	3/8
GPF400-13	4	4 Solid	2/0 Stranded	2.25	6.50	5.81	3/8
GPF400-25	4	2/0 Solid	250 MCM	2.25	6.75	5.81	3/8
GPF400-50	4	300 MCM	500 MCM	2.88	7.25	6.19	1/2
GPF450-13	4 1/2	4 Solid	2/0 Stranded	2.25	7.00	6.31	3/8
GPF450-25	4 1/2	2/0 Solid	250 MCM	2.50	7.25	6.31	3/8
GPF450-50	4 1/2	300 MCM	500 MCM	2.88	7.75	6.69	1/2
GPF500-13	5	4 Solid	2/0 Stranded	2.25	7.56	6.88	3/8
GPF500-25	5	2/0 Solid	250 MCM	2.50	7.81	6.88	3/8
GPF500-50	5	300 MCM	500 MCM	2.88	8.31	7.25	1/2
GPF600-13	6	4 Solid	2/0 Stranded	2.25	8.50	7.94	3/8
GPF600-25	6	2/0 Solid	250 MCM	2.50	8.75	7.94	3/8
GPF600R-25	6	2/0 Solid	250 MCM	2.50	8.75	7.31	3/8
GPF600-50	6	300 MCM	500 MCM	2.88	9.25	8.38	1/2

DOSSERT®

TYPE GS

Grounding Clamp for 2 Cables to Pipe at 90°

A ground connector for grounding two wires or cables to a ground rod pipe. Designed to accommodate a wide range of conductor sizes.

Material



Copper Alloy

Note

For tin plating add suffix "-SN" to catalog number. Example: GS38-25-SN

Hardware

Everdur U-bolts, nuts and lockwashers

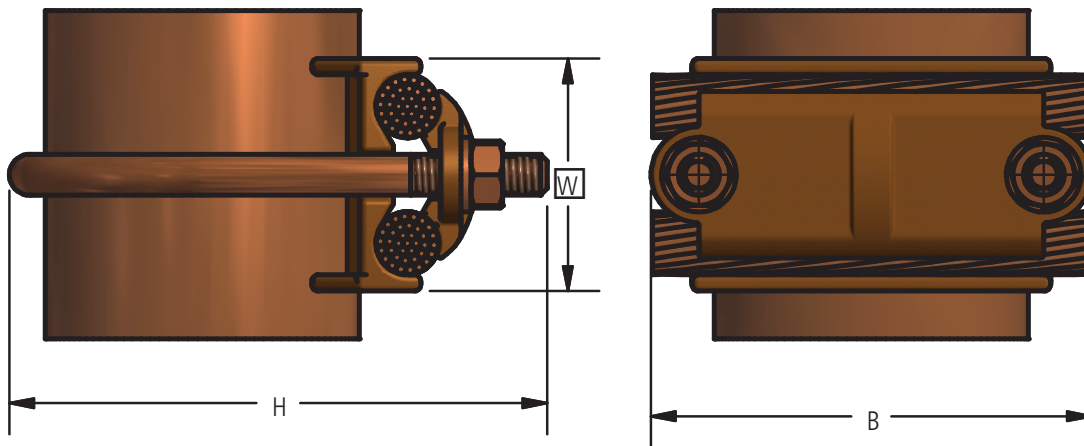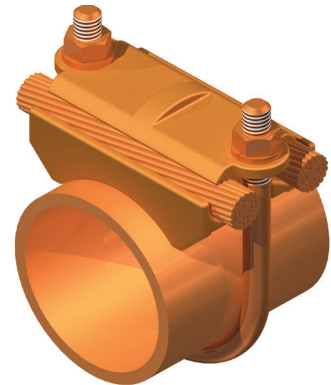

Ordering Information

CATALOG NUMBER	GROUNDING		CABLE RANGE		DIMENSIONS IN INCHES			BOLT SIZE
	PIPE SPS	ROD	MIN	MAX	B	H	W	
GS25-4	1/4	1/2	8 Solid	4 Stranded	1 13/16	2 1/8	1 7/16	3/8
GS25-13	1/4	1/2	4 Solid	2/0 Stranded	1 13/16	2 1/4	1 7/8	3/8
GS25-25	1/4	1/2	2/0 Solid	250 MCM	1 13/16	2 7/16	2 3/16	3/8
GS38-4	3/8	5/8 - 3/4	8 Solid	4 Stranded	2	2 5/16	2	3/8
GS38-13	3/8	5/8 - 3/4	4 Solid	2/0 Stranded	2	2 1/2	2	3/8
GS38-25	3/8	5/8 - 3/4	2/0 Solid	250 MCM	2	2 5/8	2	3/8
GS38-50	3/8	5/8 - 3/4	300 MCM	500 MCM	2 3/8	3 3/16	2 3/8	1/2
GS75-4	1/2 - 3/4	7/8 - 1	8 Solid	4 Stranded	2 3/8	2 3/4	1 7/16	3/8
GS75-13	1/2 - 3/4	7/8 - 1	4 Solid	2/0 Stranded	2 3/8	2 15/16	1 7/8	3/8
GS75-25	1/2 - 3/4	7/8 - 1	2/0 Solid	250 MCM	2 3/8	3 1/16	2 3/16	3/8
GS75-50	1/2 - 3/4	-	300 MCM	500 MCM	2 3/4	3 1/2	2 7/8	1/2
GS100-4	1	-	8 Solid	4 Stranded	2 5/8	3 1/16	1 7/16	3/8
GS100-13	1	-	4 Solid	2/0 Stranded	2 5/8	3 3/16	1 7/8	3/8
GS100-25	1	-	2/0 Solid	250 MCM	2 5/8	3 3/8	2 3/16	3/8
GS100-50	1	-	300 MCM	500 MCM	2 5/8	3 15/16	2 7/8	1/2
GS100-75	1	-	500 MCM	750 MCM	3 1/4	4 1/8	3 1/4	1/2
GS150-4	1 1/2	2	8 Solid	4 Stranded	3 3/16	4	1 7/16	3/8
GS150-13	1 1/2	2	4 Solid	2/0 Stranded	3 1/4	4	1 7/8	3/8
GS150-25	1 1/2	2	2/0 Solid	250 MCM	3 1/4	4	2 3/16	3/8
GS150-50	1 1/2	2	300 MCM	500 MCM	3 5/8	4 7/8	2 3/4	1/2
GS200-13	2	-	4 Solid	2/0 Stranded	3 11/16	4 3/8	1 7/8	3/8
GS200-25	2	-	2/0 Solid	250 MCM	3 11/16	4 1/2	2 3/16	3/8
GS250-13	2 1/2	-	4 Solid	2/0 Stranded	4 3/16	4 15/16	1 7/8	3/8
GS250-25	2 1/2	-	2/0 Solid	250 MCM	4 3/16	5 1/16	2 3/16	3/8
GS300-13	3	-	4 Solid	2/0 Stranded	4 13/16	5 7/16	1 7/8	3/8
GS300-25	3	-	2/0 Solid	250 MCM	4 13/16	5 7/16	2 3/16	3/8
GS350-25	3 1/2	-	4 Solid	2/0 Stranded	5 5/16	6 1/16	1 7/8	3/8
GS350-50	3 1/2	-	300 MCM	500 MCM	5 5/16	6 1/16	2 1/4	3/8

DOSSERT®

TYPE GW

Grounding Clamp for 2 Cables to Pipe in Parallel




A clamp type grounding connector for grounding two cables to a single rod or pipe. A single cable may be used by looping back on itself. Each connector is designed to accommodate a wide range of conductor sizes. Other sizes than those listed can be promptly furnished.

Material

Copper Alloy

Hardware

Everdur U-bolts, nuts and lockwashers

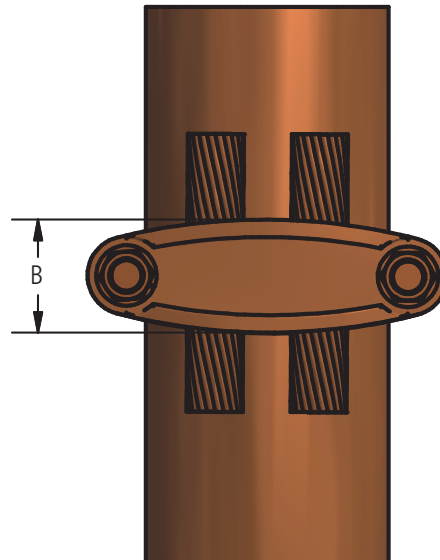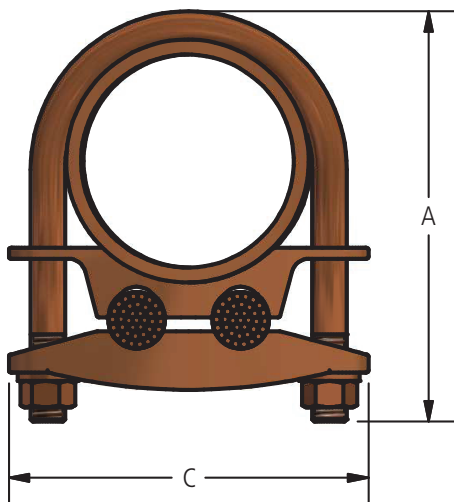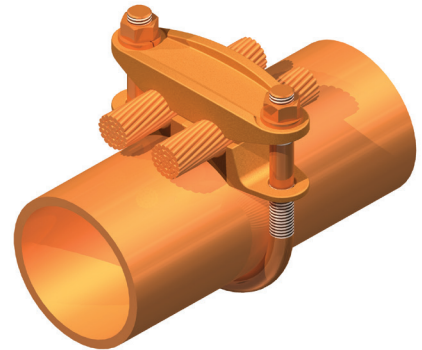

DOSSERT®

TYPE GW

Grounding Clamp for 2 Cables to Pipe in Parallel

Ordering Information

CATALOG NUMBER	GROUNDING		CABLE RANGE		DIMENSIONS IN INCHES			BOLT SIZE
	PIPE SPS	ROD	MIN	MAX	A	B	C	
GW38-4	3/8	5/8 - 3/4	#8 Solid	#4 Stranded	2 3/8	1 1/8	2 1/16	3/8
GW38-13	3/8	5/8 - 3/4	#4 Solid	2/0 Stranded	2 9/16	1 1/8	2 1/16	3/8
GW38-25	3/8	5/8 - 3/4	2/0 Solid	250 MCM	2 3/4	1 1/8	2 1/16	3/8
GW75-4	3/4	7/8 - 1	#8 Solid	#4 Stranded	2 5/8	1 1/8	2 3/8	3/8
GW75-13	3/4	7/8 - 1	#4 Solid	2/0 Stranded	2 3/4	1 1/8	2 3/8	3/8
GW75-25	3/4	7/8 - 1	2/0 Solid	250 MCM	2 7/8	1 1/8	2 3/8	3/8
GW75-50	3/4	7/8 - 1	300 MCM	500 MCM	4 1/8	1 9/16	3 5/8	3/8
GW100-4	1	1 1/8 - 1 1/4	#8 Solid	#4 Stranded	2 15/16	1 1/8	2 5/8	3/8
GW100-13	1	1 1/8 - 1 1/4	#4 Solid	2/0 Stranded	3	1 1/8	2 5/8	3/8
GW100-25	1	1 1/8 - 1 1/4	2/0 Solid	250 MCM	3 5/16	1 1/8	2 5/8	3/8
GW100-50	1	1 1/8 - 1 1/4	300 MCM	500 MCM	4 1/8	1 9/16	3 5/8	1/2
GW125-4	1 1/4	1 3/8 - 1 5/8	#8 Solid	#4 Stranded	3 3/16	1 3/8	3	3/8
GW125-13	1 1/4	1 3/8 - 1 5/8	#4 Solid	2/0 Stranded	3 5/16	1 3/8	3	3/8
GW125-25	1 1/4	1 3/8 - 1 5/8	2/0 Solid	250 MCM	3 5/8	1 7/16	3	3/8
GW125-50	1 1/4	1 3/8 - 1 5/8	300 MCM	500 MCM	4 1/2	1 9/16	4	1/2
GW150-4	1 1/2	1 3/4 - 2	#8 Solid	#4 Stranded	3 1/2	1 3/8	3 1/4	3/8
GW150-13	1 1/2	1 3/4 - 2	#4 Solid	2/0 Stranded	3 11/16	1 3/8	3 1/4	3/8
GW150-25	1 1/2	1 3/4 - 2	2/0 Solid	250 MCM	3 3/4	1 7/16	3 1/4	3/8
GW150-50	1 1/2	1 3/4 - 2	300 MCM	500 MCM	4 7/16	1 9/16	3 5/8	1/2
GW200-4	2	2 - 2 3/8	#8 Solid	#4 Stranded	4	1 3/8	3 11/16	3/8
GW200-13	2	2 - 2 3/8	#4 Solid	2/0 Stranded	4 3/8	1 3/8	3 11/16	3/8
GW200-25	2	2 - 2 3/8	2/0 Solid	250 MCM	4 1/2	1 1/2	3 11/16	3/8
GW200-50	2	2 - 2 3/8	300 MCM	500 MCM	4 7/8	1 9/16	4 1/16	1/2
GW250-4	2 1/2	2 5/8 - 2 7/8	#8 Solid	#4 Stranded	4 1/2	1 3/8	4 3/16	3/8
GW250-13	2 1/2	2 5/8 - 2 7/8	#4 Solid	2/0 Stranded	4 13/16	1 3/8	4 3/16	3/8
GW250-25	2 1/2	2 5/8 - 2 7/8	2/0 Solid	250 MCM	4 15/16	1 1/2	4 3/16	3/8
GW250-50	2 1/2	2 5/8 - 2 7/8	300 MCM	500 MCM	5 1/4	1 9/16	4 9/16	1/2
GW250-75	2 1/2	2 5/8 - 2 7/8	500 MCM	750 MCM	5 7/8	1 5/8	4 15/16	5/8
GW300-4	3	3 1/4 - 3 1/2	#8 Solid	#4 Stranded	5 1/8	1 3/8	4 13/16	3/8
GW300-13	3	3 1/4 - 3 1/2	#4 Solid	2/0 Stranded	5 7/16	1 3/8	4 13/16	3/8
GW300-25	3	3 1/4 - 3 1/2	2/0 Solid	250 MCM	5 9/16	1 3/8	4 13/16	3/8
GW300-50	3	3 1/4 - 3 1/2	300 MCM	500 MCM	5 7/8	1 9/16	5 3/16	1/2
GW300-75	3	3 1/4 - 3 1/2	500 MCM	750 MCM	6 1/2	1 5/8	5 9/16	5/8
GW300-100	3	3 1/4 - 3 1/2	750 MCM	1000 MCM	6 5/8	1 3/4	5 9/16	5/8
GW350-4	3 1/2	3 3/4 - 4	#8 Solid	#4 Stranded	5 5/8	1 1/2	5 5/16	3/8
GW350-13	3 1/2	3 3/4 - 4	#4 Solid	2/0 Stranded	5 5/16	1 1/2	5 5/16	3/8
GW350-25	3 1/2	3 3/4 - 4	2/0 Solid	250 MCM	6 1/16	1 1/2	5 5/16	3/8
GW350-50	3 1/2	3 3/4 - 4	300 MCM	500 MCM	6 3/8	1 9/16	5 11/16	1/2
GW350-75	3 1/2	3 3/4 - 4	500 MCM	750 MCM	7	1 5/8	6 11/16	5/8
GW350-100	3 1/2	3 3/4 - 4	750 MCM	1000 MCM	7 1/8	1 3/4	6 11/16	5/8
GW400-4	4	4 1/4 - 4 1/2	#8 Solid	#4 Stranded	6 1/8	1 5/8	5 13/16	3/8
GW400-13	4	4 1/4 - 4 1/2	#4 Solid	2/0 Stranded	6 3/16	1 5/8	5 13/16	3/8
GW400-25	4	4 1/4 - 4 1/2	2/0 Solid	250 MCM	6 1/2	1 5/8	5 13/16	3/8
GW400-50	4	4 1/4 - 4 1/2	300 MCM	500 MCM	6 7/8	1 5/8	6 3/16	1/2
GW400-75	4	4 1/4 - 4 1/2	500 MCM	750 MCM	7 1/2	1 5/8	6 9/16	5/8
GW400-100	4	4 1/4 - 4 1/2	750 MCM	1000 MCM	7 5/8	1 3/4	6 9/16	5/8
GW600-4	6	-	#8 Solid	#4 Stranded	8 3/8	1 1/2	7 15/16	3/8
GW600-25	6	-	2/0 Solid	250 MCM	8 5/8	1 5/8	7 15/16	3/8

DOSSERT®

TYPE GZ

Grounding Clamp for 3 Cables to Pipe in Parallel

A triple conductor grounding clamp for grounding three wires or cables to the same ground rod or pipe. The high range of variability permits use of a number of conductor sizes for one connector. The high corrosion resistance of the connector permits the entire assembly to be covered with earth after installation is made.

Material




Copper Alloy

Hardware

Everdur U-bolts, nuts and lockwashers

Notes

- For tin plating, add suffix "-SN" to catalog number. EX: GZ125-50-SN
- For stainless steel bolts, lockwashers and Everdur nuts, add suffix "-SSHBN" to catalog number. EX: GZ125-50-SSHBN
- All sizes are not shown. Please contact the factory.

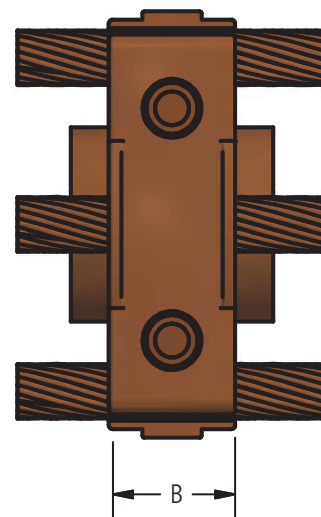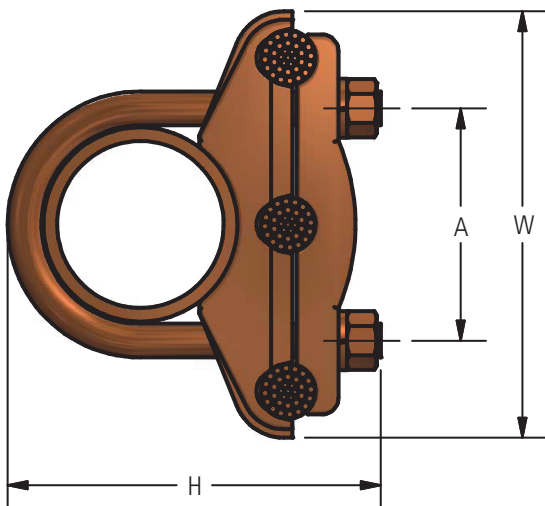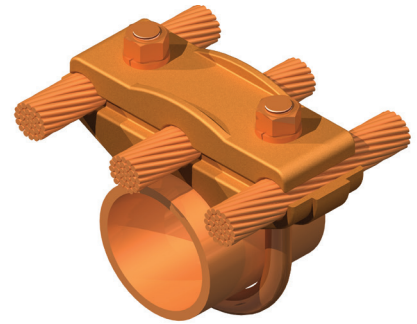

DOSSERT®

TYPE GZ

Grounding Clamp for 3 Cables to Pipe in Parallel

Ordering Information

CATALOG NUMBER	GROUNDING		CONDUCTOR RANGE		DIMENSIONS IN INCHES				BOLT SIZE
	PIPE SPS	ROD	MIN	MAX	A	B	H	W	
GZ25-4	1/4	1/2	8 Solid	#4 Stranded	1	1 1/2	2 1/16	2 1/4	3/8
GZ25-13	1/4	1/2	4 Solid	2/0 Stranded	1	1 1/2	2 5/16	2 3/4	3/8
GZ25-25	1/4	1/2	2/0 Solid	250 MCM	1 1/8	1 1/2	2 11/16	3 3/16	1/2
GZ38-4	3/8	5/8 or 3/4	8 Solid	#4 Stranded	1 3/16	1 1/2	2 5/8	2 3/4	3/8
GZ38-13	3/8	5/8 or 3/4	4 Solid	2/0 Stranded	1 3/16	1 1/2	2 7/8	3 3/16	3/8
GZ38-25	3/8	5/8 or 3/4	2/0 Solid	250 MCM	1 5/16	1 1/2	3 3/16	3 3/4	1/2
GZ38-50	3/8	5/8 or 3/4	300 MCM	500 MCM	1 5/16	1 5/8	3 7/16	4 3/16	1/2
GZ75-4	1/2 or 3/4	7/8 or 1	8 Solid	#4 Stranded	1 1/2	1 1/2	2 5/8	2 3/4	3/8
GZ75-13	1/2 or 3/4	7/8 or 1	4 Solid	2/0 Stranded	1 1/2	1 1/2	2 7/8	3 3/16	3/8
GZ75-25	1/2 or 3/4	7/8 or 1	2/0 Solid	250 MCM	1 5/8	1 1/2	3 3/16	3 3/4	1/2
GZ75-50	1/2 or 3/4	7/8 or 1	300 MCM	500 MCM	1 5/8	1 5/8	3 7/16	4 3/16	1/2
GZ100-4	1	1 1/8 - 1 1/4	8 Solid	#4 Stranded	1 3/4	1 1/2	2 13/16	2 15/16	3/8
GZ100-13	1	1 1/8 - 1 1/4	4 Solid	2/0 Stranded	1 3/4	1 1/2	3	2 15/16	3/8
GZ100-25	1	1 1/8 - 1 1/4	2/0 Solid	250 MCM	1 7/8	1 1/2	3 7/16	4	1/2
GZ100-50	1	1 1/8 - 1 1/4	300 MCM	500 MCM	1 7/8	1 7/8	3 11/16	4 7/16	1/2
GZ125-4	1 1/4	1 3/8 - 1 5/8	8 Solid	#4 Stranded	2 1/8	1 1/2	3 1/4	3 15/16	3/8
GZ125-13	1 1/4	1 3/8 - 1 5/8	4 Solid	2/0 Stranded	2 1/8	1 1/2	3 7/16	3 3/4	3/8
GZ125-25	1 1/4	1 3/8 - 1 5/8	2/0 Solid	250 MCM	2 1/4	1 1/2	3 13/16	4 3/8	1/2
GZ125-50	1 1/4	1 3/8 - 1 5/8	300 MCM	500 MCM	2 1/4	1 7/8	4 1/8	4 13/16	1/2
GZ150-4	1 1/2	1 5/8 - 1 7/8	8 Solid	#4 Stranded	2 3/8	1 1/2	3 1/2	3 5/8	3/8
GZ150-13	1 1/2	1 5/8 - 1 7/8	4 Solid	2/0 Stranded	2 3/8	1 1/2	3 11/16	4 1/16	3/8
GZ150-25	1 1/2	1 5/8 - 1 7/8	2/0 Solid	250 MCM	2 1/2	1 1/2	4 1/8	4 11/16	1/2
GZ150-50	1 1/2	1 5/8 - 1 7/8	300 MCM	500 MCM	2 1/2	1 7/8	4 3/8	5 1/8	1/2
GZ200-4	2	2 - 2 1/2	8 Solid	#4 Stranded	2 13/16	1 1/2	4 1/16	4 1/16	3/8
GZ200-13	2	2 - 2 1/2	4 Solid	2/0 Stranded	2 13/16	1 1/2	4 5/16	4 1/2	3/8
GZ200-25	2	2 - 2 1/2	2/0 Solid	250 MCM	2 15/16	1 1/2	4 11/16	5 1/8	1/2
GZ200-50	2	2 - 2 1/2	300 MCM	500 MCM	2 15/16	1 7/8	4 15/16	5 9/16	1/2
GZ250-4	2 1/2	2 5/8 - 2 7/8	8 Solid	#4 Stranded	3 5/16	1 1/2	4 3/4	4 9/16	3/8
GZ250-13	2 1/2	2 5/8 - 2 7/8	4 Solid	2/0 Stranded	3 5/16	1 1/2	5	5	3/8
GZ250-25	2 1/2	2 5/8 - 2 7/8	2/0 Solid	250 MCM	3 7/16	1 1/2	5 3/8	5 5/8	1/2
GZ250-50	2 1/2	2 5/8 - 2 7/8	300 MCM	500 MCM	3 7/16	1 7/8	5 5/8	6 1/16	1/2
GZ300-4	3	3 1/4 - 3 1/2	8 Solid	#4 Stranded	4	1 1/2	5 3/8	5 3/16	3/8
GZ300-13	3	3 1/4 - 3 1/2	4 Solid	2/0 Stranded	4	1 1/2	5 3/8	5 5/8	3/8
GZ300-25	3	3 1/4 - 3 1/2	2/0 Solid	250 MCM	4 1/8	1 1/2	6	6 1/4	1/2
GZ300-50	3	3 1/4 - 3 1/2	300 MCM	500 MCM	4 1/8	1 7/8	6 1/4	6 11/16	1/2
GZ300-75	3	3 1/4 - 3 1/2	500 MCM	750 MCM	4 1/4	2 1/4	6 1/2	7 3/16	5/8
GZ350-13	3 1/2	3 3/4 - 4	4 Solid	2/0 Stranded	4 7/16	1 1/2	5 13/16	6	3/8
GZ400-13	4	4 1/4 - 4 1/2	4 Solid	2/0 Stranded	-	-	-	-	3/8
GZ400-25	4	4 1/4 - 4 1/2	2/0 Solid	250 MCM	-	-	-	-	1/2
GZ400-50	4	4 1/4 - 4 1/2	300 MCM	500 MCM	-	-	-	-	1/2