
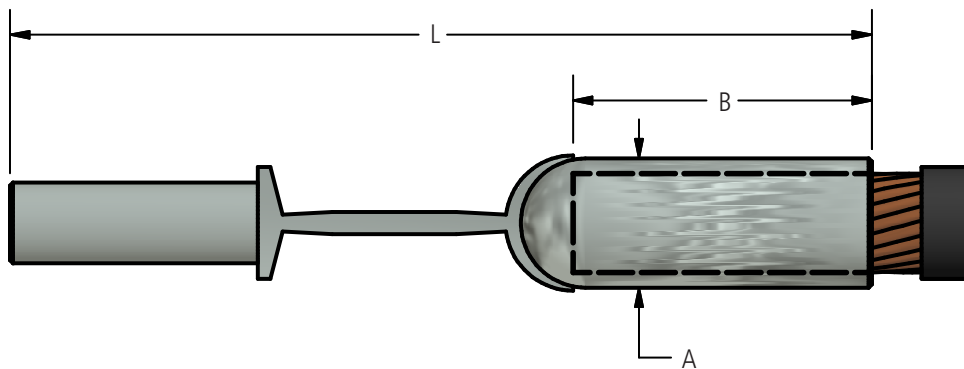


DOSSERT®

Types ML-R3, ML-P3 MICON Limiter for Use with MICON Limiter Assembly Types ML-R123 and ML-P123

The MICON limiter is designed to provide a fusible connecting point to the MICON outlet. The fusible section is made to close tolerances to insure consistent conformity with the fusing time-current curves. The limiter will clear on severe loads or faults but will not clear on system overloads of short period.

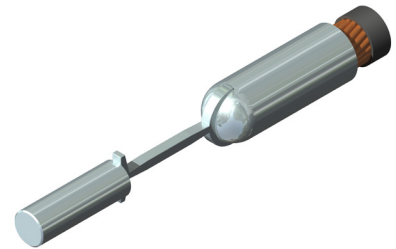

Ordering Information

CATALOG NUMBER		CABLE SIZE	INDENTS IN CABLE SOCKET	DIMENSIONS IN INCHES		
FOR RUBBER INSULATED CABLE	FOR PAPER* INSULATED CABLE			A**	B	L
ML21-R3	ML21-P3	4/0 STR	1	11/16	1 7/8	6 1/8
ML25-R3	ML25-P3	250 MCM	1	3/4	1 7/8	6 1/8
ML30-R3	ML30-P3	300 MCM	2	13/16	2	6 5/8
ML35-R3	ML35-P3	350 MCM	2	7/8	2	7
ML40-R3	ML40-P3	400 MCM	2	31/32	2 1/8	7
ML50-R3	ML50-P3	500 MCM	2	1 1/16	2 3/4	8 1/8
ML75-R3	ML75-P3	750 MCM	2	1 5/16	2 3/4	9 1/8

* Closed end of sockets are sealed to make sockets oil tight.

** Diameter.