
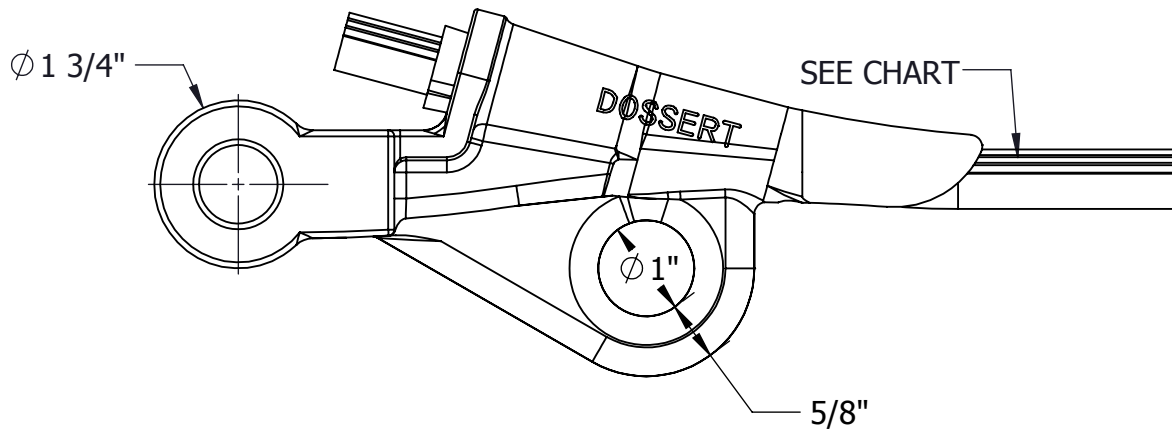


THIS DRAWING AND ALL INFORMATION ON IT IS THE PROPERTY OF AFL. IT IS CONFIDENTIAL AND IT IS GIVEN TO YOU FOR A LIMITED PURPOSE AND MUST BE RETURNED UPON REQUEST. NEITHER THIS DRAWING OR ANY PART OF IT NOR ANY INFORMATION CONCERNING IT MAY BE COPIED, EXHIBITED, OR FURNISHED TO OTHERS NOR PHOTOGRAPHS TAKEN OF ANY ARTICLE FABRICATED OR ASSEMBLED FROM THE DRAWING WITHOUT THE CONSENT OF AFL.

ITEM NO:

DWG. NO:

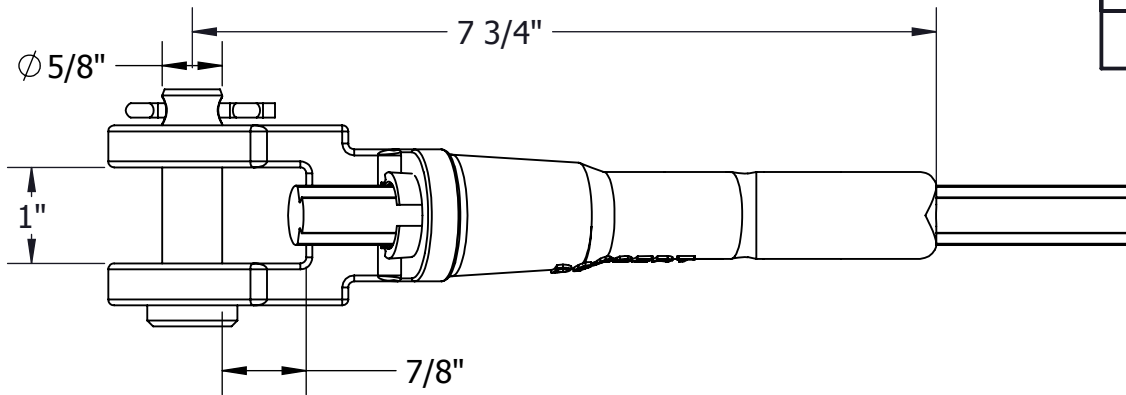

ITEM NO.	PART NO.	WIRE SIZE	DIA.	BREAKING STRENGTH
	FTDEW-13T-DL1	2/0 CW	.392"	7,906
	FTDEW-21T-DL1	4/0 CW	.482"	11,490
	FTDEW-30T-DL1	300 CW	.574"	15,260
	FTDEW-35T-DL1	350 CW	.620"	17,240

**MATERIAL:**

BODY - ALUMINUM BRONZE ASTM B30

**HARDWARE:**

CLEVIS PIN - STEEL, ASTM A193, HDG\*


COTTER PIN & SLEEVE - STAINLESS STEEL

**MECHANICAL RATINGS:**

BREAK ALL GROOVE/SOLID CONTACT WIRES

WT: 2.7 LB

\* = HOT DIP GALVANIZED

LOCATION					CONTRACT NO		CUST / CONTR	
REVISIONS					DRN BY: JL  DRN DATE: 10.23.13  CHK BY: JL  CHK DATE: 10.23.13  PA 2017.359			
DESCRIPTION	DATE	BY	APR	DEAD END, CONTACT WIRE, CLEVIS W/ 5/8" PIN, RIGGING EYE				
					REV 0	PART NO: FTDEW-DL1_SERIES		1 OF 1