THIS DRAWING AND ALL INFORMATION ON IT IS THE PROPERTY OF AFL. IT IS CONFIDENTIAL AND IT IS GIVEN TO YOU FOR A LIMITED PURPOSE AND MUST BE RETURNED UPON REQUEST. NEITHER THIS DRAWING OR ANY PART OF IT NOR ANY INFORMATION CONCERNING IT MAY BE COPIED, EXHIBITED, OR FURNISHED TO OTHERS NOR PHOTOGRAPHS TAKEN OF ANY ARTICLE FABRICATED OR ASSEMBLED FROM THE DRAWING WITHOUT THE CONSENT OF AFL.

ITEM NO:

DWG. NO:

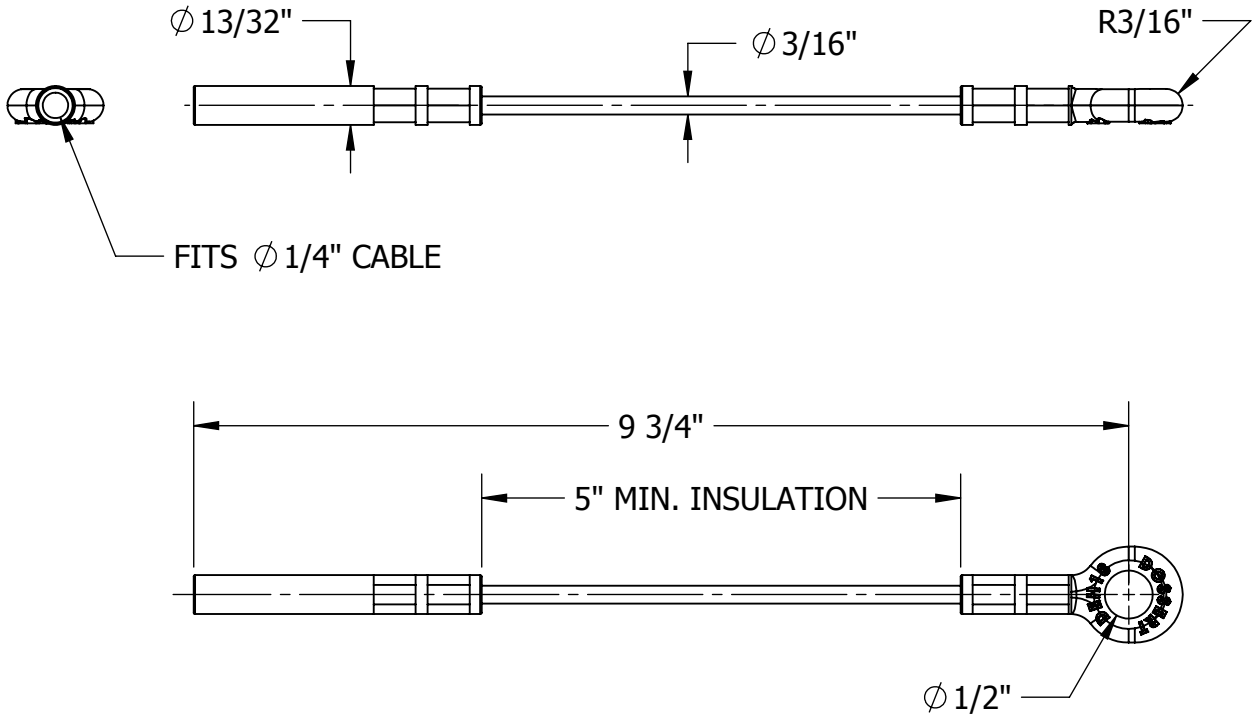

MATERIAL:
INSULATOR ENDS - COPPER ALLOY
INSULATOR ROD - 3/16" EPOXY - FIBERGLASS

MECHANICAL RATINGS:
TENSION: 250 LBS
(WORKING LOAD)
PROOF LOAD: 500 LBS
ULTIMATE LOAD: 600 LBS

ELECTRICAL RATINGS:
OPERATING VOLTAGE: 750 VDC

CRIMP DIES:
DIE SET, ALCOA P/N: B75SH-05SH SPACE
CRIMPS 1/8" FROM OPEN END. SPACE BETWEEN CRIMPS, 1/8".
2 CRIMPS PER END REQUIRED.

WT: 0.17 LB

LOCATION	CONTRACT NO	CUST / CONTR

REVISIONS

REV	DESCRIPTION	DATE	BY	APR

DRN BY: JL
DRN DATE: 9.18.17
CHK BY: JL
CHK DATE: 9.18.17
PA 2017.359

AFL DOSSERT®

INSULATOR, STRAIN, 3/16", EYE/SLEEVE, SML= 600LBS

REV 0 | PART NO: INS18-25-ES-STD | 1 OF 1