

## UltraSlim 1RU V-Panel BASE-8 with 144 Fibers (with Rear Manager)

The UltraSlim 1RU V-Panel BASE-8 with 144 Fibers is designed to allow connection of BASE-8 100/40G (MPO) with lower-speed 25/10G interfaces (LC DX). High-density design offers optimal space management with tool-free extraction, finger access to LC ports. Fixed panel offers both installation speed and cost effectiveness against legacy high-density modular systems. The shallow depth of UltraSlim profile is unique making it suitable for low depth cabinet or racking systems. The V-shape front profile, together with cable management accessories, facilitates managing front and rear cabling. Low loss MPO and LC Premium terminations are offered featuring significantly improved low insertion losses for demanding low power budget, high-speed networks.

### Features

- Dedicated BASE-8 configuration for 144 x Fibers
- UltraSlim profile suitable for low depth racks or cabinet
- Extraction-free LC port finger access
- Improved installation time and cost effectiveness of single panel
- V-shape profile improves patching management
- Optimized Performance – Low loss MPO and LC terminations assure low insertion losses and power penalties in tight power budget, high-speed network environments
- Rapid Deployment – Factory pre-populated panel saves installation time – 1 x click to connect 12 fibers using MPO interface

### Applications



- Data Communication Applications
- Data Center Infrastructure
- Storage Area Network – Fiber Channel
- 40 and 100 Gbps BASE-8

### Ordering Information

CODE		FIBER TYPE		CODE		END B		CODE
A	-	4 (OM4)	-	USABBPV	-	A (LC)	-	-05DN (STANDARD)
		W (OM5)				B (LCA)		-05XX (CUSTOM)
		7 (G.657A1)						

# UltraSlim 1RU V-Panel BASE-8 with 144 Fibers (with Rear Manager)

## Technical Drawings

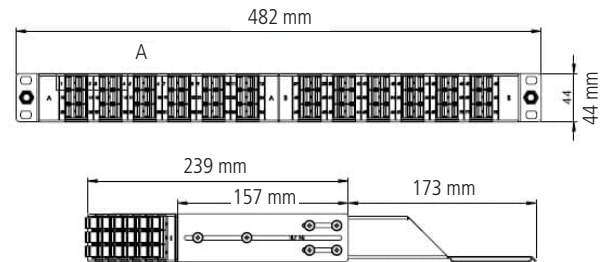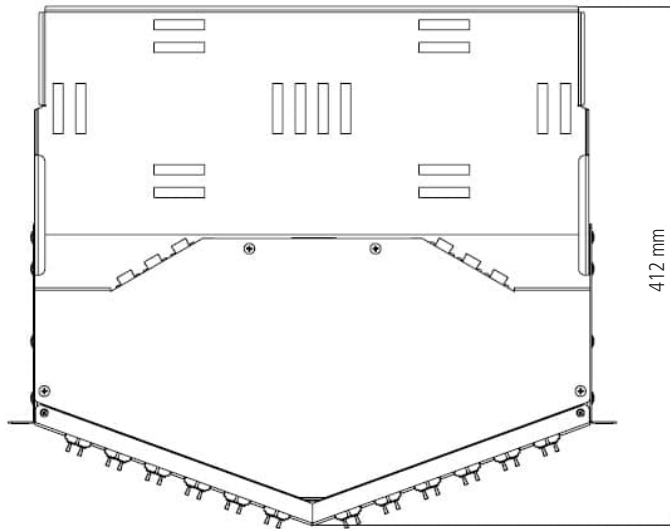

## Specifications

PARAMETER	VALUE
Fiber Types	SM G.657A1, MM OM4
Fiber Count	144
MPO Adapters	IEC 61754 and EIA/TIA 604-5 Body Color: Black Polarity: A/C – Keyway up-Keyway down Body Color: Grey Polarity: B – Keyway up-Keyway up
LC Adapter	LC Quad Body Color: Aqua (MM)(OM4), Blue (SM/UPC), Green (SM/APC)
Terminations	MPO Low Loss Premium (12 Fiber Ferrule) with LC Low Loss Premium
Dimensions (W x D x H) Packaged	464 mm x 196 mm x 44 mm 545 mm x 260 mm x 70 mm
Weight Packaged	2 kg 2.2 kg

## Qualifications

GOVERNING BODY	STANDARD CODES	COMPONENT
IEC	61754 61300-3-4, 61300-3-34, 61300-3-6	MPO Adapters LC Adapters
EIA/TIA	604-5	MPO Adapters

## Temperature Specifications

TEMPERATURE RANGE	
STORAGE	-20°C to +60°C
INSTALLATION	-20°C to +60°C
OPERATING	-20°C to +60°C

## UltraSlim 1RU V-Panel BASE-8 with 144 Fibers (with Rear Manager)

### Connector Performance

CONNECTOR MATING	INSERTION LOSS (IL) AVERAGE	IL MAX	RETURN LOSS (RL)
MPO Premium (MM)	0.10 dB	0.35 dB	N/A
NA	NA	NA	N/A
MPO Premium (SM)	0.10 dB	0.35 dB	>60 dB
NA	NA	NA	N/A

OPTICAL PERFORMANCE	MM PREMIUM	NA	SM PREMIUM	NA
IL Max/Master (Acceptance)	0.15 dB	NA	0.15 dB	NA
Ave/Master	0.08 dB	NA	0.12 dB	NA
Ave/Random	0.10 dB	NA	0.12 dB	NA
RL (Min Acceptance)	NA	NA	55/65 dB*	NA

\*UPC/APC