



Type DPSR Split Solder Reducing Coupler

A split tinned copper reducing coupler for soldering a wide range of conductor sizes. Made of pure copper with a full hot tin dip coating which facilitates field soldering and ensures a good connection.

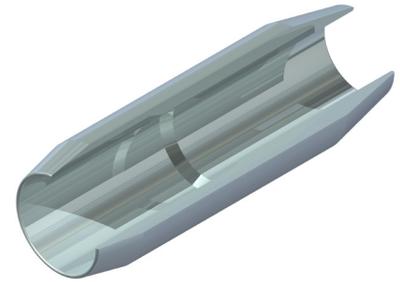

Quarter section view to show detail

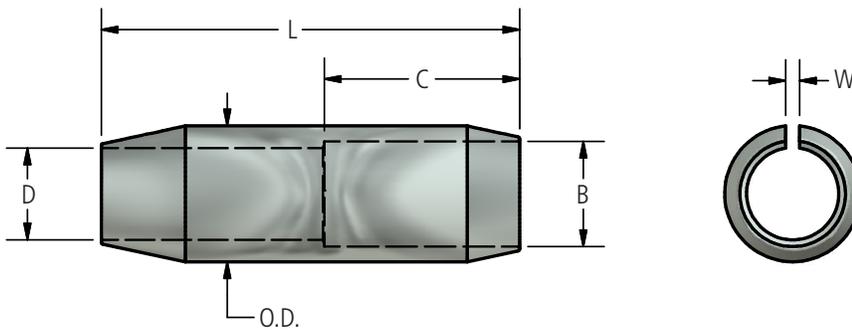

Ordering Information

Catalog Number	Conductor Size		Dimensions in inches					
	D	B	B	C	D	L	O.D.	W
DPSR10-35	1/0	350	.690	1 1/4	2 1/2	.378	.920	.120
DPSR25-35	250	350	.690	1 1/4	2 1/2	.581	.920	.120
DPSR25-50	250	500	.826	1 1/2	3	.581	1.102	.120
DPSR30-35	300	350	.690	1 1/4	2 1/2	.635	.920	.120
DPSR30-50	300	500	.828	1 1/2	2 1/2	.635	1.102	.120
DPSR35-40	350	400	.740	1 1/2	3	.690	.986	.120
DPSR35-50	350	500	.826	1 1/2	3	.690	1.102	.120
DPSR35-60	350	650	.948	1 3/4	3 1/2	.690	1.260	.175
DPSR40-50	400	500	.826	1 1/2	3	.740	1.102	.120
DPSR40-65	400	650	.948	1 3/4	3 1/2	.740	1.260	.175
DPSR50-65	500	650	.948	1 3/4	3 1/2	.740	1.260	.175

AFL's Dossert® product line offers a wide range of substation accessories in low voltage up to 765 kV applications in bronze or aluminum materials.