


THIS DRAWING AND ALL INFORMATION ON IT IS THE PROPERTY OF AFL. IT IS CONFIDENTIAL AND IT IS GIVEN TO YOU FOR A LIMITED PURPOSE AND MUST BE RETURNED UPON REQUEST. NEITHER THIS DRAWING OR ANY PART OF IT NOR ANY INFORMATION CONCERNING IT MAY BE COPIED, EXHIBITED, OR FURNISHED TO OTHERS NOR PHOTOGRAPHS TAKEN OF ANY ARTICLE FABRICATED OR ASSEMBLED FROM THE DRAWING WITHOUT THE CONSENT OF AFL.

ITEM NO:

DWG. NO:

B-7685A

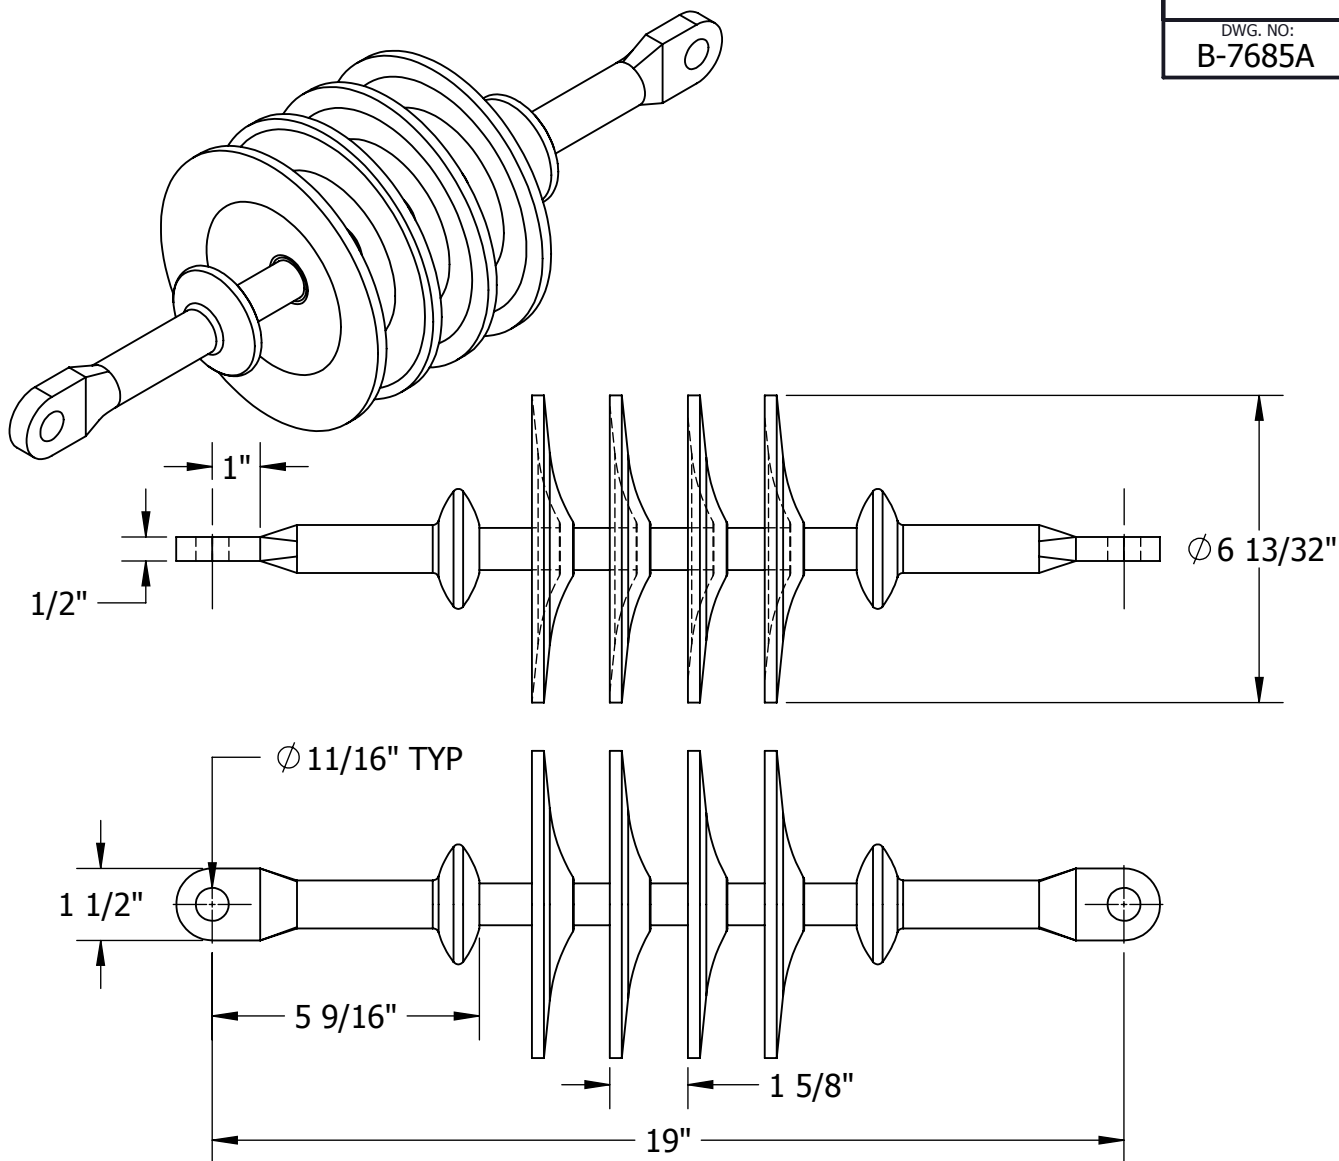

MATERIAL:

CORE - FIBERGLASS REINFORCED EPOXY

SHEDS - SILICON RUBBER

COLOR - LUSTERLESS MED. GREY

END FITTINGS - FORGED STEEL, H.D.G* TO ASTM A153

MECHANICAL RATING:

WORKING LOAD: 10,000 LBS

ULTIMATE LOAD: 25,000 LBS

PROOF LOAD: 12,500 LBS

ELECTRICAL RATING:

LEAKAGE DISTANCE: 28.5 IN

DRY FLASHOVER: 110 kV

WET FLASHOVER: 93 kV

BIL: 185 kV

WT: 5.5 LB

* = HOT DIP GALVANIZED

LOCATION

CONTRACT NO

CUST / CONTR

REVISIONS

REV	DESCRIPTION	DATE	BY	APR

DRN BY:

VC

DRN DATE:

7.26.17

CHK BY:

JS

CHK DATE:

7.26.17

PA 2015.231.0

FAFL

DOSSERT®

INSULATOR, STRAIN, EYE/EYE, 19" LONG, 6"
SHEDS, 27kV, INLINE, 25K

REV
0

PART NO:

DLI161101-TT-421

1 OF 1