


DOSSERT® MICON Type MCA

A multi-outlet pre-insulated connector for secondary network cables. Cables are readily installed and are securely connected to each outlet position by the use of cable receptacles type MA. Outlet sizes on listed connectors will accommodate cable sizes at 600 MCM. For connectors required to join larger than 600 MCM cables, indicate catalog number of selected unit and refer to MICON ORDERING DATA sheet. Unless otherwise specified, connectors are insulated with GA-20 rubber compound. Type P plugs of the same material are supplied for one quarter of the number of outlets.

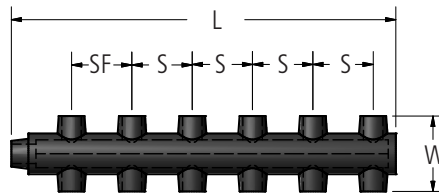

Ordering Information

CATALOG NUMBER	CURRENT RATING AMPERES	NUMBER OF OUTLETS	DIMENSIONS IN INCHES			
			L	SF	S	W
MCA150-3	1500	3	4 1/4	-	-	4 1/16
MCA150-5	1500	5	7 1/4	3	-	4 1/16
MCA150-7	1500	7	10 1/4	3	3	4 1/16
MCA150-9	1500	9	13 1/4	3	3	4 1/16
MCA150-11	1500	11	16 1/4	3	3	4 1/16
MCA150-13	1500	13	19 1/4	3	3	4 1/16
MCA150-15	1500	15	22 1/4	3	3	4 1/16
MCA150-17	1500	17	25 1/4	3	3	4 1/16
MCA250-3	2500	3	4 13/16	-	-	4 3/8
MCA250-5	2500	5	8 5/16	3 1/2	-	4 3/8
MCA250-7	2500	7	11 13/16	3 1/2	3 1/2	4 3/8
MCA250-9	2500	9	15 5/16	3 1/2	3 1/2	4 3/8
MCA250-11	2500	11	18 13/16	3 1/2	3 1/2	4 3/8
MCA250-13	2500	13	22 5/16	3 1/2	3 1/2	4 3/8
MCA250-15	2500	15	25 13/16	3 1/2	3 1/2	4 3/8
MCA250-17	2500	17	29 5/16	3 1/2	3 1/2	4 3/8
MCA300-3	3000	3	4 13/16	-	-	5
MCA300-5	3000	5	8 7/16	3 5/8	-	5
MCA300-7	3000	7	11 13/16	3 5/8	3 3/8	5
MCA300-9	3000	9	15 3/16	3 5/8	3 3/8	5
MCA300-11	3000	11	18 9/16	3 5/8	3 3/8	5
MCA300-13	3000	13	21 15/16	3 5/8	3 3/8	5
MCA300-15	3000	15	25 5/16	3 5/8	3 3/8	5
MCA300-17	3000	17	28 11/16	3 5/8	3 3/8	5

