


DWG. NO:

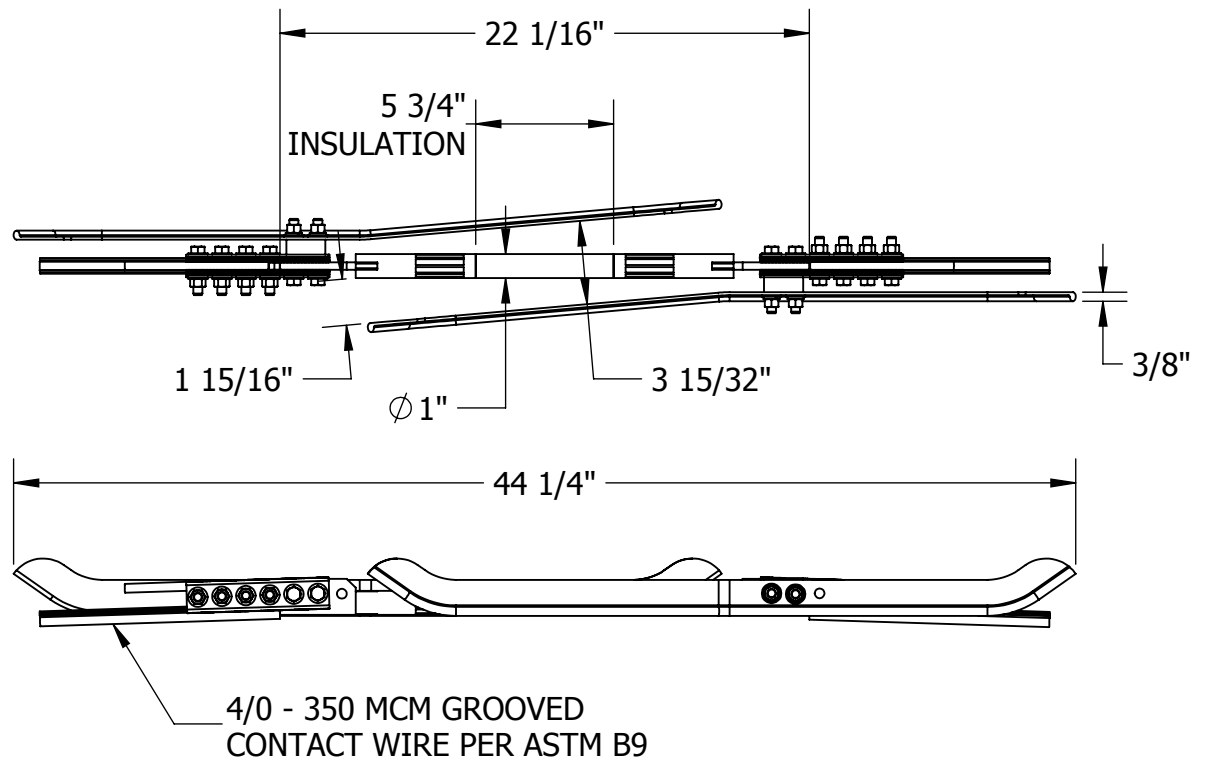

MATERIAL:

WIRE CLAMP - ALUMINUM BRONZE ASTM B30

GLIDER - COPPER ALLOY ASTM B152

SPACER - ALUMINUM ALLOY

NUTS - SILICON BRONZE

BOLTS & LOCKWASHERS - STAINLESS STEEL

MECHANICAL RATINGS:


MIN. ULTIMATE STRENGTH: 18,000 lbs

ELECTRICAL RATINGS:

VOLTAGE RATINGS: 750 VDC

BOLT SIZES	WRENCH/ SOCKET SIZES	TORQUE VALUES (FT-LBS)
3/8-16	9/16 HEX	20

WT: 12.63 LB

LOCATION				CONTRACT NO		CUST / CONTR																									
<div>REVISIONS</div> <table><thead><tr><th>DESCRIPTION</th><th>DATE</th><th>BY</th><th>APR</th></tr></thead><tbody><tr><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td></td></tr></tbody></table>				DESCRIPTION	DATE	BY	APR																					DRN BY: HV		<div></div>	
				DESCRIPTION	DATE	BY	APR																								
DRN DATE: 6.16.15																															
CHK BY: JL		SECTION INSULATOR, SINGLE TEFLON ROD, 750 VDC																													
CHK DATE: 6.16.15																															
PA 2017.270.0																															
REV 0		PART NO: HS-S3		1 OF 1																											