


Swage Grounding Conductor Range

Notes


- Swage Grounding products will be marked with cable equivalent size. Other permissible connections are shown in the table below.
- All Swage Grounding parts with compression barrels must be stamped with the target conductor offering on that size.
- Stamping should include:
 - AFL
 - AFL No.
 - Target conductor for both runs and/or taps
 - Die size
- Use table below to determine the copper cable equivalent target size. For sizes without a Copper cable listed, use intended rod size (i.e. 75C mark as 3/4" Cu Rod).
- 242050F requires two die crimps. Stamp "45TD24", 45TD20" & "Must be swaged with both dies" on part.

Part Number



Product Stamp

AFL
SWGC2017
3/0 CU
45TD20

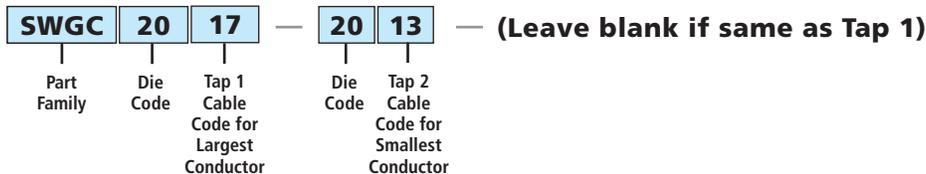

AFL
SWGC2017-2013
TAP 1 3/0 CU
TAP 2 1/0-2/0 CU
45TD20

CABLE EQUIVALENT

DMC CODE	AFL CABLE CODE	COPPER	COPPERCLAD CABLE	COPPERCLAD ROD	STEEL ROD OR REBAR
06G	2	#6	1/#6	—	—
04G	4	#4	1/#4 & 3/#10	—	—
02G	6	#2	1/#2, 3/#8 & 3/#9	—	—
002	13	1/0-2/0	3/#5, 3/#6, 3/#7, 7/#8, 7/#9, & 7/#10	—	—
003	17	3/0	7/#7 & 7/#6	—	#3 REBAR
004	21	4/0	7/#5	1/2" PLAIN AND THREADED	—
025	25	250 MCM	19/#9	5/8" PLAIN AND THREADED	#4 REBAR
030	30	300 MCM	19/#8	—	—
035	35	350 MCM	—	—	—
040	40	400 MCM	19/#7	—	—
625	62S	—	—	—	#5 REBAR
045	45	450 MCM	—	—	—
682	75C	—	—	3/4" PLAIN AND THREADED	—
050	50	500 MCM	19/#6	—	—
053	50R	—	19/#5	—	—
053	50F	500 ROPELAY	—	—	—
750	75S	—	—	—	3/4" PLAIN
914	100C	—	—	1" PLAIN AND THREADED	—
950	100S	—	—	—	1" PLAIN
100	100	1000	—	—	—