

Drop Dead End for ADSS Cable – Light

The Drop Dead Ends are designed for use on ADSS cable in Light NESC Loading environments. Available with AFL's Multi-Drop Thimble Eye (second photo) which is used to anchor aerial round drop cables to the distribution structure. The Thimble Eye has uniform radial slots that can accommodate up to four formed wire dead ends per thimble eye and support tensioning up to 90 degrees from the installation hardware.




Multi-Drop Thimble Eye
(ordered separately)

Features

- Designed for use in Light NESC Loading environments (see map below)
- Made of Aluminum Alloy material
- Easy and quick installation
- No special tools or hardware required for installation
- Small, requiring less storage space
- Available with Multi-Drop Thimble Eye (ordered separately)



Drop Dead End shown with
Single-Drop Thimble Eye

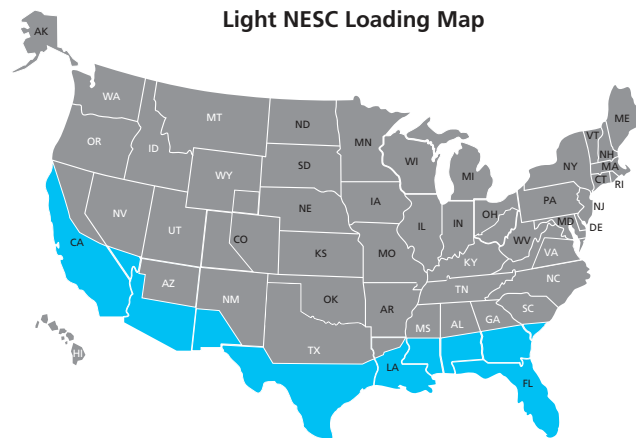

For more information on the optional Multi-Drop Thimble Eye (ordered separately), see [specification sheet](#).

continued
→

Drop Dead End for ADSS Cable – Light

Ordering Information

Drop Dead End AFL No. includes a Thimble Eye (TE).

For more information on the optional Multi-Drop Thimble Eye (ordered separately), see [specification sheet](#).

AFL NO.	NO. OF RODS	CABLE O.D. (in.)	"L" LENGTH (in.)	TENSILE STRENGTH (lbs)	WEIGHT (lbs)	COLOR CODE
ADELD2E012TE	5	Ø0.250" - Ø0.280"	20.000	787	1.64	Yellow
ADELD2E013TE	5	Ø0.281" - Ø0.309"	22.440	787	1.66	Green
ADELD2E014TE	5	Ø0.310" - Ø0.341"	24.803	787	1.69	Blue
ADELD2E015TE	6	Ø0.342" - Ø0.374"	27.559	787	1.76	Brown
ADELD2E001TE	6	Ø0.375" - Ø0.414"	27.952	787	1.77	Red
ADELD2E - 424005TE	7	Ø0.415" - Ø0.459"	31.102	787	1.87	Pink
ADELD2E003TE	7	Ø0.460" - Ø0.505"	33.070	787	1.90	Green
ADELD2E004TE	6	Ø0.506" - Ø0.557"	37.000	787	1.96	Pink
ADELD2E005TE	6	Ø0.558" - Ø0.615"	42.125	787	2.33	Yellow
ADELD2E006TE	6	Ø0.616" - Ø0.680"	44.881	787	2.72	Blue
ADELD2E007TE	6	Ø0.681" - Ø0.750"	48.818	787	2.82	Brown

