


Installation Instructions

CB-30-3AL Coil Storage Bracket

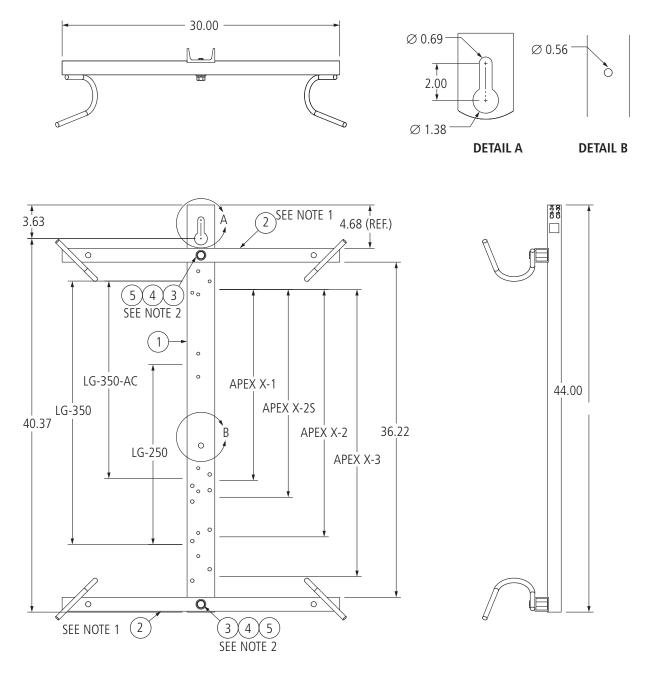

NOTES

- 1. Place tube assemblies in location as shown.
- 2. Stainless steel bolts to be torqued to 35 lbs-ft.


BILL OF MATERIAL


- 1. Channel
- 2. Square Tube Assembly
- 3. Hex Head Bolt 1/2-13 UNC x 2.00
- 4. Flat Washer 1/2 x 1-1/4 OD
- 5. Split Lock Washer, 1/2



Installation Instructions (cont.)

CB-30-3AL Coil Storage Bracket

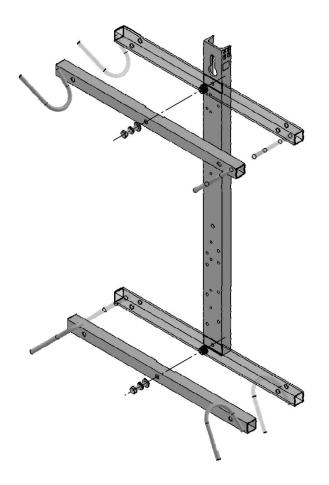

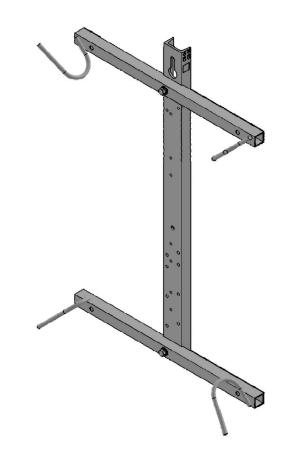

EXPLODED VIEW SEE NOTE 1

ISOMETRIC VIEW

NOTES

- 1. Place tube assemblies in location as shown.
- 2. Stainless steel bolts to be torqued to 35 lbs-ft.