
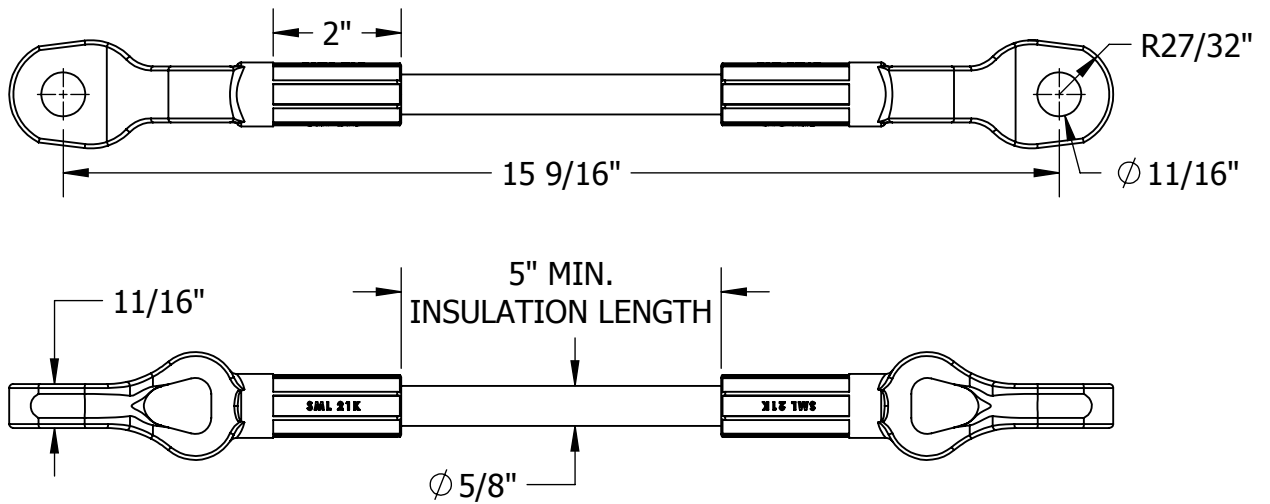


THIS DRAWING AND ALL INFORMATION ON IT IS THE PROPERTY OF AFL. IT IS CONFIDENTIAL AND IT IS GIVEN TO YOU FOR A LIMITED PURPOSE AND MUST BE RETURNED UPON REQUEST. NEITHER THIS DRAWING OR ANY PART OF IT NOR ANY INFORMATION CONCERNING IT MAY BE COPIED, EXHIBITED, OR FURNISHED TO OTHERS NOR PHOTOGRAPHS TAKEN OF ANY ARTICLE FABRICATED OR ASSEMBLED FROM THE DRAWING WITHOUT THE CONSENT OF AFL.

ITEM NO:

DWG. NO:

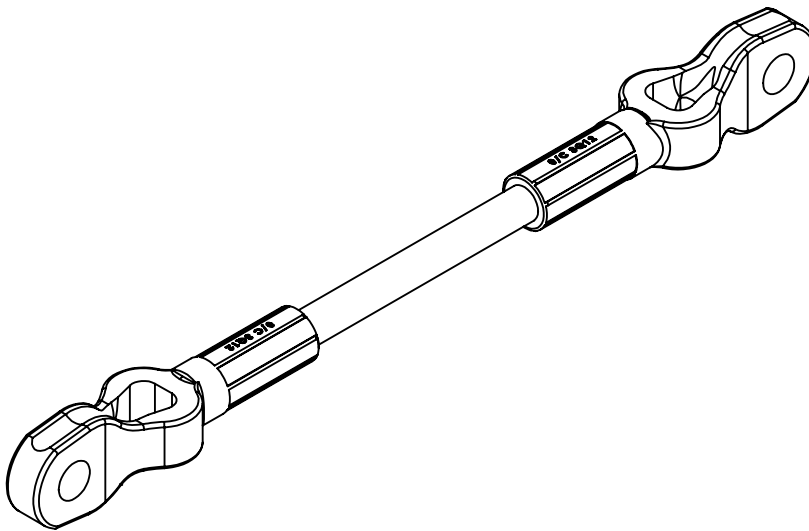

MATERIAL

*STEEL, H.D.G.

INSULATOR ROD - EPOXY

MECHANICAL RATING

WORKING LOAD: 5,000 LBS
PROOF LOAD: 7,500 LBS
ULTIMATE LOAD: 10,000 LBS

ELECTRICAL RATING

LEAKAGE DISTANCE: 5.0 IN
DRY FLASHOVER: 60 kV
WET FLASHOVER: 31 kV
OPERATING VOLTAGE: 750 VDC

WT: LB

* = HOT DIP GALVANIZED

THIS DRAWING ASSIGNED	LOCATION					CONTRACT NO		CUST / CONTR	
	REV					DRN BY: DK DRN DATE: 9.16.13 CHK BY: JL CHK DATE: 9.16.13 PA 2013-1926			
	REV	DESCRIPTION	DATE	BY	APR		INSULATOR, 5/8" THIMBLED TONGUE/THIMBLE TONGUE		
					REV 0		PART NO:	INS63-TETE-STD	1 OF 1