

DOSSERT[®] TYPE SCB-F-V-AA

Stud Connector

The pad is finished on both sides. Can be furnished to accommodate stud diameters or threads per inch other than listed below. Designed for 500 kV service.



Material

Aluminum Alloy

Hardware

Yellow anodized aluminum nuts, bolts and lockwashers.

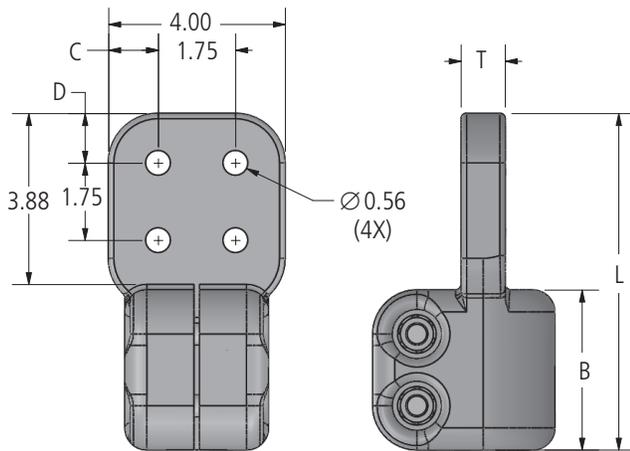


FIG. 1




FIG. 2

Ordering Information

CATALOG NUMBER	FIG. NO.	STUD SIZE		DIMENSIONS IN INCHES					BOLT SIZE
		DIAMETER	THREADS PER INCH	B	C	D	L	T	
SCB112-1/2F-4N4-V-T12-AA	1	1.13	12	2.75	1.13	1.13	7.50	0.50	1/2
SCB175-1F-4N4-V-T12-AA	1	1.75	12	3.00	1.13	1.13	7.75	1.00	1/2
SCB150-3/4F-4N4-V-T12-AA	1	1.50	12	3.00	1.13	1.13	7.75	0.75	1/2
SCB200-3/4F-4N4-V-T12-AA	1	2.00	12	3.00	1.13	1.13	7.75	0.75	1/2
SCB197-3/4F-4N4-V-T0-AA	1	50 MM	0	3.00	1.13	1.13	7.75	0.75	1/2
SCB200-1F-4N4-V-T12-AA	1	2.00	12	3.00	1.13	1.13	7.75	1.00	1/2
SCB250-1F-6N4-V-T12-AA	2	2.50	12	3.25	1.25	1.13	7.94	1.00	1/2
SCB300-3/4F-4N4-V-T12-AA	1	3.00	12	3.88	1.13	1.13	8.13	0.75	1/2
SCB300-1F-4N4-V-T12-AA	1	3.00	12	3.25	1.13	1.13	8.13	1.00	1/2
SCB300-1F-6N4-V-T12-AA	2	3.00	12	3.25	1.25	1.13	8.13	1.00	1/2
SCB300-4.5B-1F-6N4-V-T12-AA	2	3.00	12	4.50	1.25	1.13	9.38	1.00	5/8
SCB315-1F-4N4-V-T0-AA	1	80 MM	0	3.50	1.13	1.13	8.13	1.00	1/2
SCB350-1.13F-4N4-V-T12-AA	1	3.50	12	3.50	1.13	1.13	8.38	1.13	5/8