
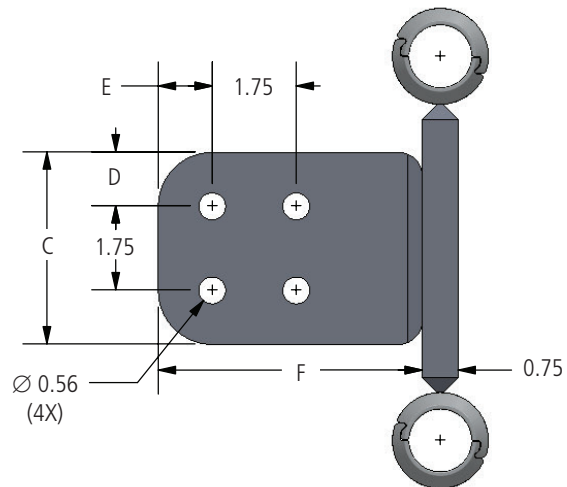


TYPE SWAS-N-AA

Swage Split Cable Spacer with NEMA Pad

Material

Aluminum Alloy

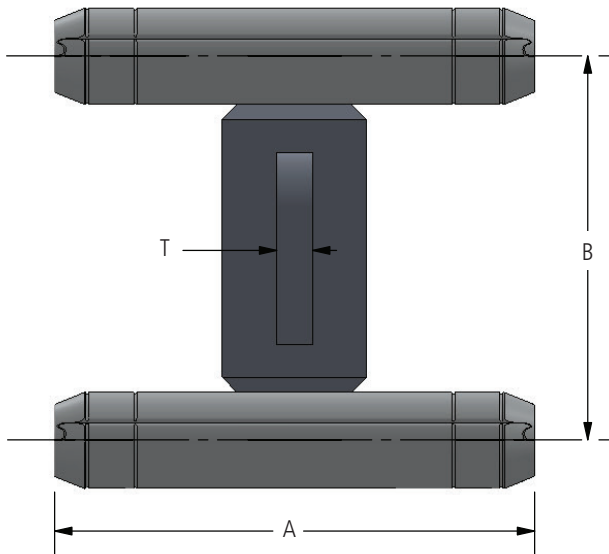

Ordering Information

AFL NO.	CABLE RANGE		DIMENSIONS (inches)								DIE SIZE
	AAC	ACSR	A	B	C	D	E	F	T		
SWAS1613-8-4N4-AA	2/0	1/0	9.00	8.00	4.00	1.13	1.13	5.50	0.75	45TD16	
SWAS1625-8-4N4-AA	250	4/0	9.00	8.00	4.00	1.13	1.13	5.50	0.75	45TD16	
SWAS2026-8-4N4-AA	266.8	266.8 (18/1)	9.00	8.00	4.00	1.13	1.13	5.50	0.75	45TD20	
SWAS2030-8-4N4-AA	300	266.8 (26/7)	9.00	8.00	4.00	1.13	1.13	5.50	0.75	45TD20	
SWAS2035-8-4N4-AA	336.4, 350	300 (26/7), 336.4 (18/1)	9.00	8.00	4.00	1.13	1.13	5.50	0.75	45TD20	
SWAS2039-8-4N4-AA	397.5	336.4 (26/7), 336.4 (30/7), 397.5 (18/1)	9.00	8.00	4.00	1.13	1.13	5.50	0.75	45TD20	
SWAS2445-8-4N4-AA	450	397.5 (24/7), 397.5 (26/7)	9.13	8.00	4.00	1.13	1.13	5.50	0.75	45TD24	
SWAS2447-8-4N4-AA	477	397.5 (30/7)	9.13	8.00	4.00	1.13	1.13	5.50	0.75	45TD24	
SWAS2450-8-4N4-AA	500	477 (18/1)	9.13	8.00	4.00	1.13	1.13	5.50	0.75	45TD24	
SWAS2455-8-4N4-AA	556.5	477 (24/7), 477 (26/7)	9.13	8.00	4.00	1.13	1.13	5.50	0.75	45TD24	

continued
→

TYPE SWAS-N-AA

Swage Split Cable Spacer with NEMA Pad

Ordering Information

AFL NO.	CABLE RANGE		DIMENSIONS (inches)							DIE SIZE
	AAC	ACSR	A	B	C	D	E	F	T	
SWAS2860-8-4N4-AA	600	477 (30/7), 556.5 (18/1)	10.00	8.00	4.00	1.13	1.13	5.50	0.75	45TD28
SWAS2863-8-4N4-AA	636	556.5 (24/7), 556.5 (26/7)	10.00	8.00	4.00	1.13	1.13	5.50	0.75	45TD28
SWAS2871-8-4N4-AA	700, 715.5	556.5 (30/7), 605 (24/7), 605 (26/7), 636 (18/1), 636 (36/1)	10.00	8.00	4.00	1.13	1.13	5.50	0.75	45TD28
SWAS3075-8-4N4-AA	750	605 (30/7), 605 (30/19), 636 (24/7), 636 (26/7)	10.00	8.00	4.00	1.13	1.13	5.50	0.75	45TD30
SWAS3079-8-4N4-AA	795	636 (30/7), 636 (30/19), 666.6 (24/7), 666.6 (26/7), 715.5 (24/7), 715.5 (54/7), 795 (36/1)	10.00	8.00	4.00	1.13	1.13	5.50	0.75	45TD30
SWAS3079-6-4N4-AA	795	636 (30/7), 636 (30/19), 666.6 (24/7), 666.6 (26/7), 715.5 (24/7), 715.5 (54/7), 795 (36/1)	10.00	6.00	4.00	1.13	1.13	5.50	0.75	45TD30
SWAS3087-8-4N4-AA	874.5	715.5 (26/7), 715.5 (30/19), 795 (45/7)	10.00	8.00	4.00	1.13	1.13	5.50	0.75	45TD30
SWAS3290-8-4N4-AA	900	795 (24/7), 795 (54/7), 795 (26/7)	10.00	8.00	4.00	1.13	1.13	5.50	0.75	45TD32
SWAS3295-6-4N4-AA	954	795 (30/19), 900 (45/7)	10.00	6.00	4.00	1.13	1.13	5.50	0.75	45TD32
SWAS3295-8-4N4-AA	954	795 (30/19), 900 (45/7)	10.00	8.00	4.00	1.13	1.13	5.50	0.75	45TD32
SWAS32100-8-4N4-AA	1000	874.5 (54/7), 900 (54/7), 954 (45/7)	10.00	8.00	4.00	1.13	1.13	5.50	0.75	45TD32
SWAS32103-8-4N4-AA	1033.5	954 (54/7)	10.00	8.00	4.00	1.13	1.13	5.50	0.75	45TD32
SWAS32111-8-4N4-AA	1113	1033.5 (45/7), 1033.5 (54/7)	10.00	8.00	3.00	0.63	0.63	4.50	0.75	45TD32
SWAS32111-8-4N4-AA	1113	1033.5 (45/7), 1033.5 (54/7)	10.00	8.00	4.00	1.13	1.13	5.50	0.75	45TD32
SWAS36119-8-4N4-AA	1192.5	1113 (45/7)	10.50	8.00	4.00	1.13	1.13	5.50	0.75	45TD36
SWAS36127-6-4N4-AA	1272	1113 (54/19), 1192.5 (45/7)	10.50	6.00	4.00	1.13	1.13	5.50	0.75	45TD36
SWAS36127-8-4N4-AA	1272	1113 (54/19), 1192.5 (45/7)	10.50	8.00	4.00	1.13	1.13	5.50	0.75	45TD36
SWAS36127-12-4N4-AA	1272	1113 (54/19), 1192.5 (45/7)	10.50	12.00	4.00	1.13	1.13	5.50	0.75	45TD36
SWAS36127-18-4N4-AA	1272	1113 (54/19), 1192.5 (45/7)	10.50	18.00	4.00	1.13	1.13	5.50	0.75	45TD36
SWAS36135-8-4N4-AA	1351.5	1192.5 (54/19), 1272 (45/7)	10.50	8.00	4.00	1.13	1.13	5.50	0.75	45TD36
SWAS36143-8-4N4-AA	1431	1272 (54/19), 1351.5 (45/7)	10.50	8.00	4.00	1.13	1.13	5.50	0.75	45TD36
SWAS36151-8-4N4-AA	1510.5	1351.5 (54/19), 1431 (45/7)	10.50	8.00	4.00	1.13	1.13	5.50	0.75	45TD36
SWAS36159-8-4N4-AA	1590	1431 (54/19), 1510.5 (45/7)	10.50	8.00	4.00	1.13	1.13	5.50	0.75	45TD36
SWAS36175-8-4N4-AA	1750	1510.5 (54/19), 1590 (45/7)	10.50	8.00	4.00	1.13	1.13	5.50	0.75	45TD36
SWAS36180-8-4N4-AA	1800	1590 (54/19)	10.50	8.00	4.00	1.13	1.13	5.50	0.75	45TD36
SWAS36180-18-4N4-AA	1800	1590 (54/19)	10.50	18.00	4.00	1.13	1.13	5.50	0.75	45TD36
SWAS44200-8-4N4-AA	2000	1780 (84/19)	11.50	8.00	4.00	1.13	1.13	5.50	1.00	65TD44
SWAS44230-8-4N4-AA	2250, 2300	2156 (84/19), 2167 (72/7)	11.50	8.00	4.00	1.13	1.13	5.50	1.00	65TD44
SWAS44230-18-4N4-AA	2250, 2300	2156 (84/19), 2167 (72/7)	11.50	18.00	4.00	1.13	1.13	5.50	1.00	65TD44
SWAS44250-8-4N4-AA	2500	2312 (76/19)	11.50	8.00	4.00	1.13	1.13	5.50	1.00	65TD44