

## DOSSERT® TYPE C7009 Series

### Bi-Spacer Support for Strained Conductor Recommended for Voltages Up to 765 kV


Support is designed to be corona free for 765 KV operation. Aluminum insulator mounting hardware is supplied as standard; galvanized steel hardware can be furnished on request.

#### Material

Aluminum Alloy

#### Hardware

Yellow anodized aluminum bolts, nuts, and lockwashers.  
Galvanized steel mounting hardware included.

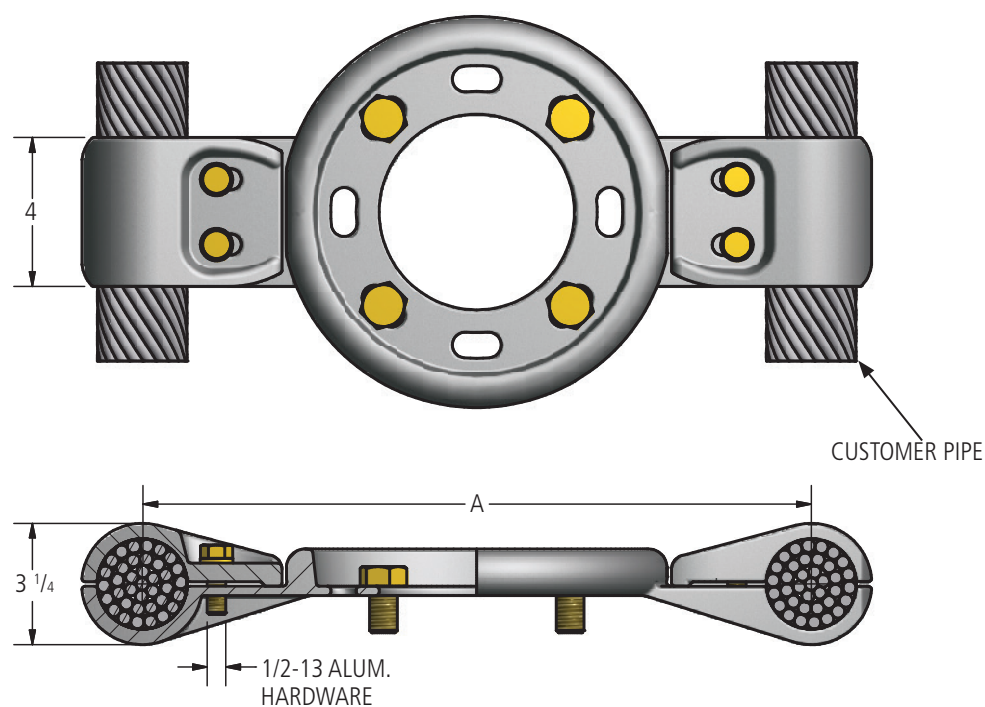

### Ordering Information

CATALOG NUMBERS	DIMENSIONS IN INCHES			NOMINAL WEIGHT LBS
	CONDUCTOR SIZE	BOLT CIRCLE	A	
	O.D.			
C7009-A	2.4	7"	18.00	11.4
C7009-B	2.311	7"	17.75	11.4
C7009-C	2.4	5"	18.00	11.4