
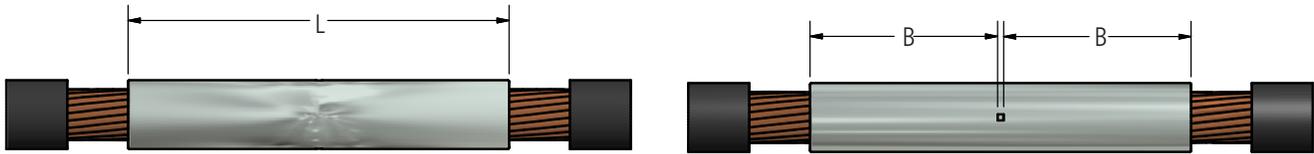


Type DPC Compression Coupler

A seamless sleeve coupler for splicing two cables end to end. This coupler is designed to fit the assembling dies of all standard hydraulic presses. Installation is quickly effected by slipping the connector over the free cable ends and forming indentations. Made of a pure high conductivity copper and tin coated.

This style also available with an internal barrier for oil seal connections.
Catalog Number: DPCP

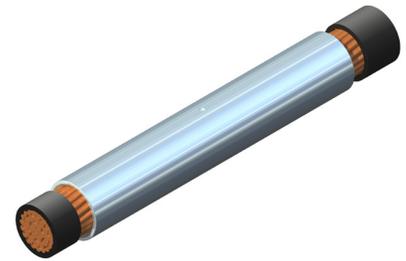

Ordering Information

Catalog Number	Cable Size D	No. of Indents per Cable	Dimensions in inches	
			B	L
DPC-1	8 STR	1	1/2	1 1/16
DPC-2	6 STR	1	1 1/8	2 5/16
DPC-4	4 STR	1	1 1/8	2 5/16
DPC-5	3 STR	1	1 1/4	2 5/8
DPC-6	2 STR	1	1 1/4	2 5/8
DPC-8	1 STR	1	1 7/16	3
DPC-10	1/0 STR	1	1 7/16	3
DPC-13	2/0 STR	1	1 1/2	3 1/8
DPC-17	3/0 STR	1	1 1/2	3 1/8
DPC-21	4/0 STR	1	1 5/8	3 3/8
DPC-25	250 MCM	1	1 5/8	3 3/8
DPC-30	300 MCM	2	2 1/16	4 1/4
DPC-35	350 MCM	2	2 1/16	4 1/4
DPC-40	400 MCM	2	2 1/8	4 3/8
DPC-50	500 MCM	2	2 1/4	4 5/8
DPC-55	550 MCM	2	2 5/8	5 3/8
DPC-60	600 MCM	2	2 11/16	5 1/2
DPC-65	650 MCM	2	2 13/16	5 3/4
DPC-75	750 MCM	2	2 7/8	5 7/8
DPC-80	800 MCM	2	2 15/16	6
DPC-85	850 MCM	2	2 15/16	6
DPC-100	1000 MCM	2	3	6 1/8
DPC-125	1250 MCM	2	3 1/4	6 5/8
DPC-130	1300 MCM	2	3 1/4	6 5/8
DPC-150	1500 MCM	2	3 1/4	6 5/8
DPC-175	1750 MCM	2	3 1/2	7 1/8
DPC-200	2000 MCM	2	3 1/2	7 1/8

AFL's Dossert® product line offers a wide range of substation accessories in low voltage up to 765 kV applications in bronze or aluminum materials.