

AFL APEX® SPLICE TRAY ADAPTERS TO INSTALL IN FOSC CLOSURES

The family of adapters are used to install AFL's Apex® Splice Trays into B, C, and D FOSC Closures. There is no compatibility with FOSC Closure A.

Ordering Information

AFL NO.	DESCRIPTION	APEX MODEL TO FOSC MODEL
AX-KIT-ADPTR-X2BTRAY-6	Kit, Apex X-2/X-2S Tray Adapter to FOSC B, 1 Kit of 6 Pieces	Apex X-2/X-2S to FOSC B
AX-KIT-ADPTR-X2BTRAY-60	Kit, Apex X-2/X-2S Tray Adapter to FOSC B, 1 Kit of 60 Pieces	Apex X-2/X-2S to FOSC B
AX-KIT-ADPTR-X2CDTRAY-6	Kit, Apex X-2/X-2S Tray Adapter to FOSC C/D, 1 Kit of 6 Pieces	Apex X-2/X-2S to FOSC C/D
AX-KIT-ADPTR-X2CDTRAY-60	Kit, Apex X-2/X-2S Tray Adapter to FOSC C/D, 1 Kit of 60 Pieces	Apex X-2/X-2S to FOSC C/D

Product Description

- Apex X-2/X-2S style trays can be installed onto a FOSC B style yoke with an Apex adapter. (Figure 1 and 2)
- Apex X-2/X-2S style trays can be installed in FOSC C/D style yoke and Apex adapter on [page 3](#). (Figures 11 and 12)

INSTALLATION OF APEX TRAY ADAPTERS ONTO FOSC B CLOSURE

- Adapter is shown with part number facing up as it will be installed. (Figure 2)
- Apex X-2/X-2S trays can only be installed in FOSC B in positions 2 through 5. (Figure 3)

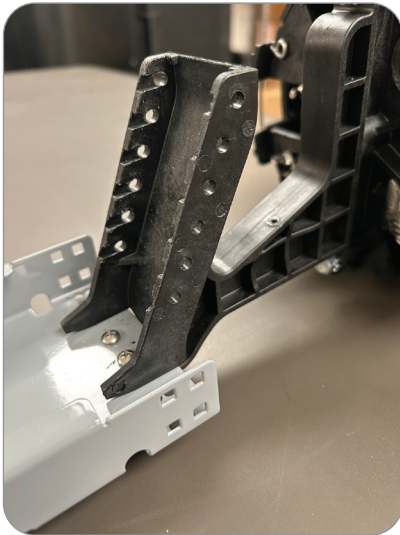


Figure 1

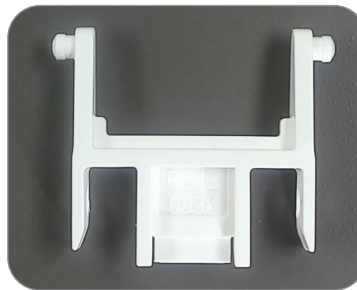


Figure 2
(Part number FC120038)

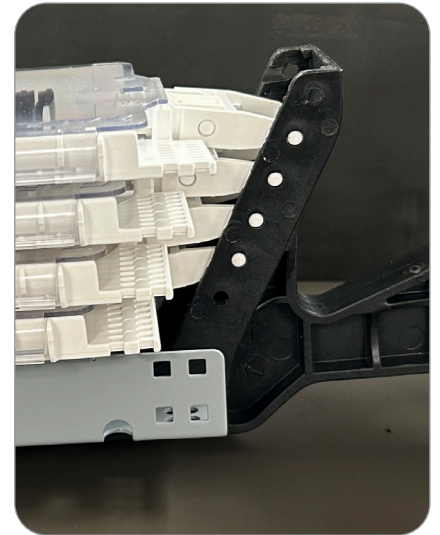


Figure 3

1. Take the adapter and position it with the part number FC120038 visible on top. (Figure 4)
2. Position the adapter where the slots are under the retention tabs and slide on Apex tray. (Figures 5 and 6)

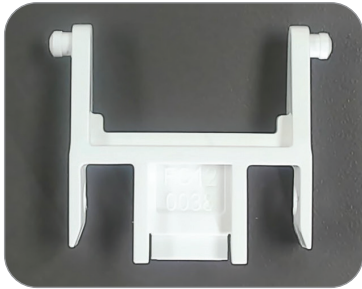


Figure 4
(Part number FC120038)

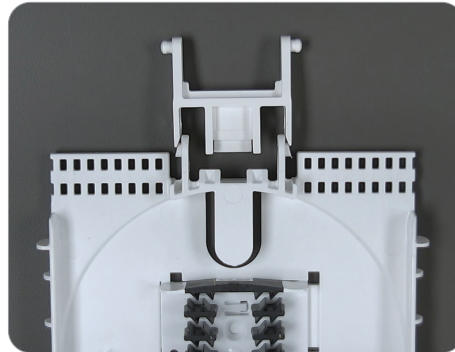


Figure 5

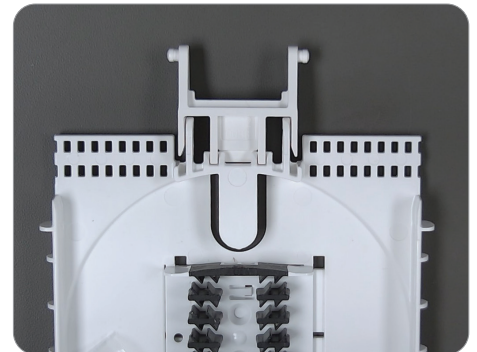


Figure 6

3. Ensure adapter is secure on the Apex splice tray.
4. Install into FOSC B closure in positions 2 to 5 only. (Figures 7, 8 and 9)

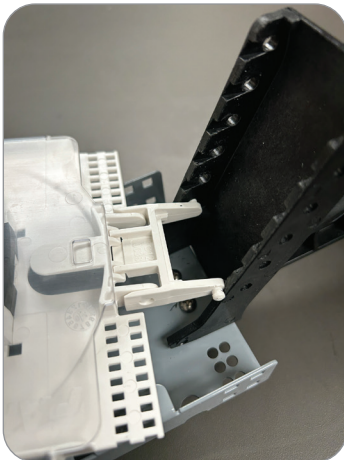


Figure 7

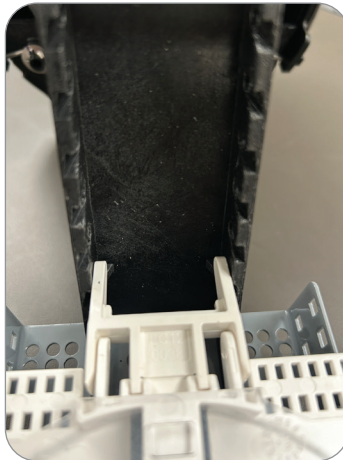


Figure 8

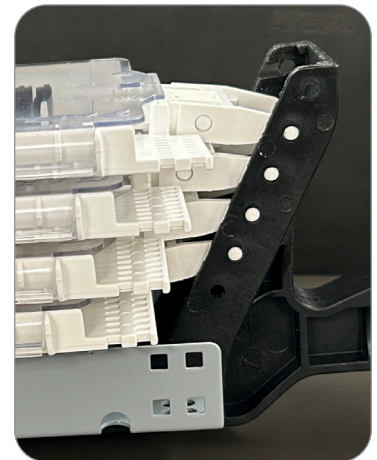


Figure 9

5. Completed installation of Apex splice trays in FOSC B closure. (Figure 10)



Figure 10

INSTALLATION OF APEX TRAY ADAPTERS ONTO FOSC C/D CLOSURE

1. FOSC C and D style closure yoke. (Figure 11)
2. Take the adapter and position it with the part number FC120037 visible on top. (Figure 12)



Figure 11

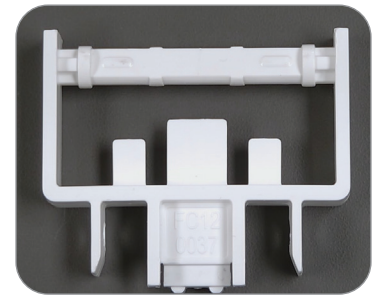


Figure 12
(Part number FC120037)

3. Position the adapter where the slots are under the retention tabs and slide on Apex tray. (Figures 13 and 14)
4. Ensure adapter is secure on the Apex splice tray.

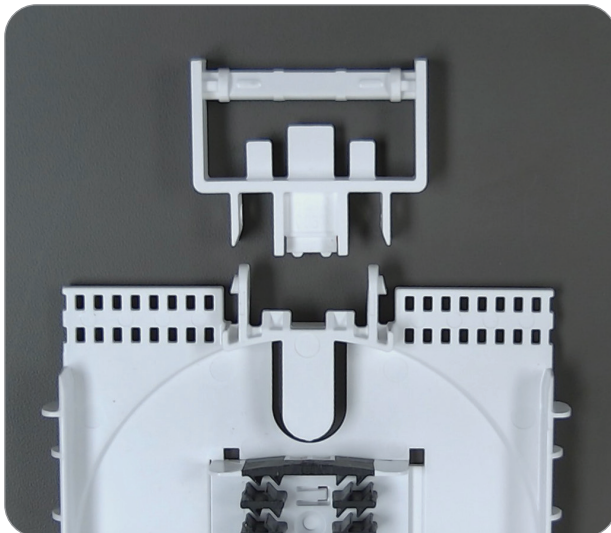


Figure 13

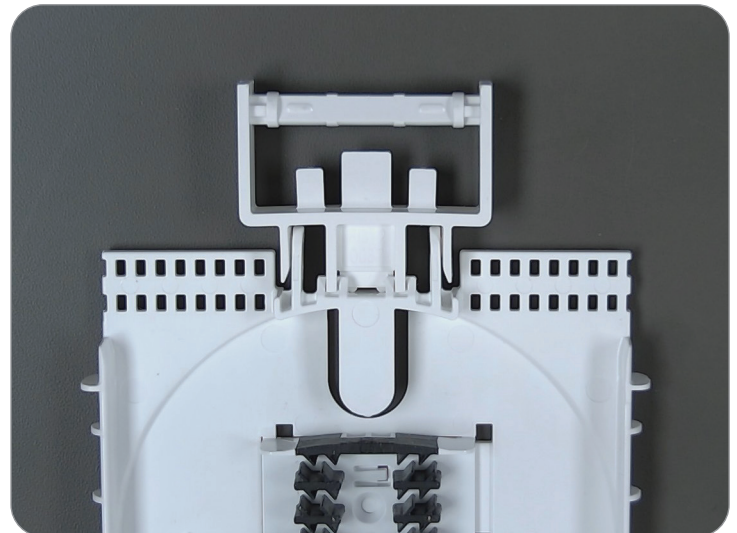


Figure 14

5. Install trays into FOSC C/D style yoke closure starting at bottom position and moving up. (Figures 15, 16 and 17)

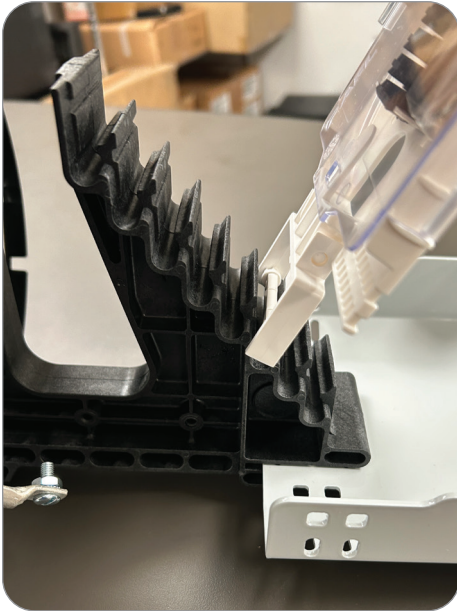


Figure 15

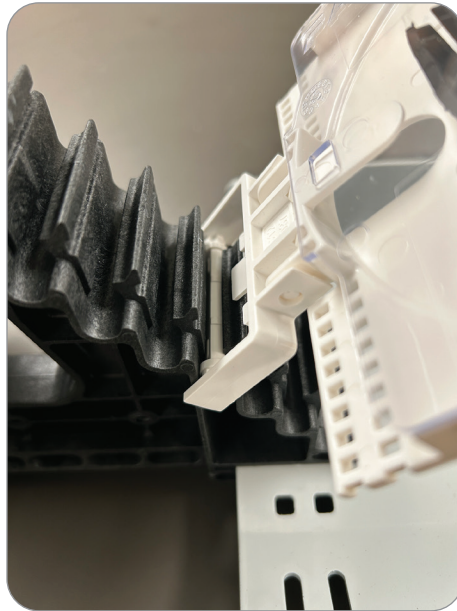


Figure 16

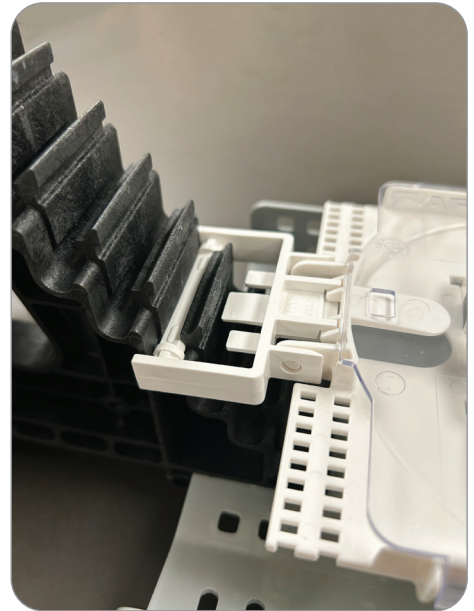


Figure 17

6. Completed installation of Apex X-2S splice trays in FOSC C (Figure 18) and X-2 splice trays in FOSC D. (Figure 19)

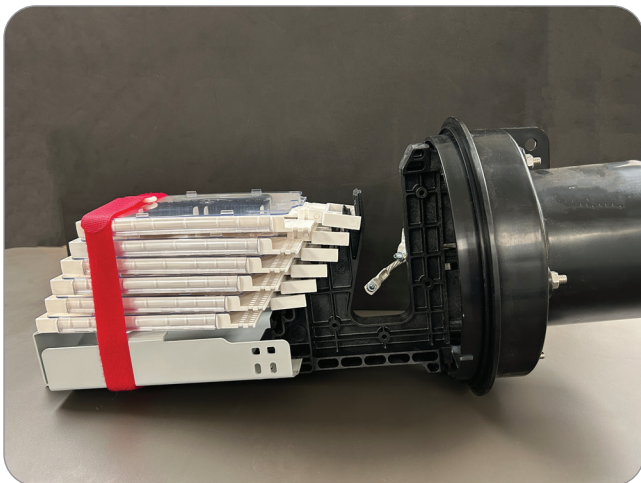


Figure 18 – Apex X-2S Trays in FOSC C



Figure 19 – Apex X-2 Trays in FOSC D