




INSTALLATION INSTRUCTIONS

MULTIPOINT HANDHOLE HANGING BRACKET KIT

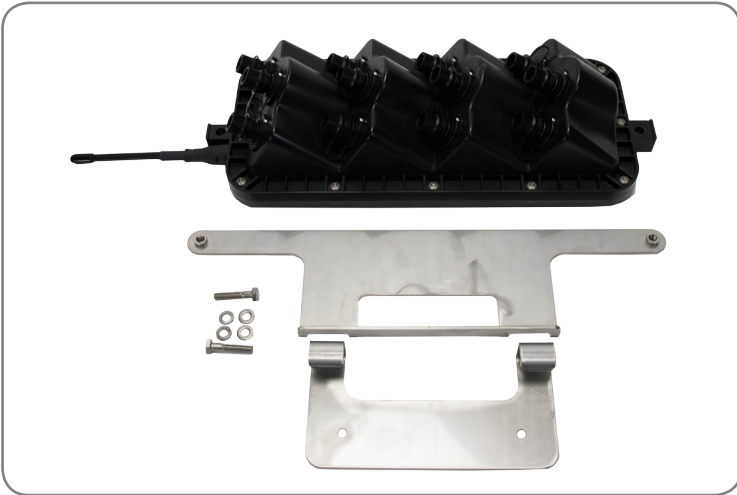

VIEW ONLINE

TABLE OF CONTENTS:

GENERAL 1

PACKAGE CONTENTS..... 1

RECOMMENDED TOOLS 1

FIBER HANDLING GUIDELINES 2

HANGING BRACKET INSTALLATION INSTRUCTIONS 2

GENERAL

Used with the TITAN RTD® Multiport series, the Hanging Bracket Kit allows for quick installation of the Multiport Terminal in a handhole or other location as desired. The two piece design allows for easy installation of the mount bracket with the ability to remove the TITAN RTD Multiport as needed in the future. The pivoting bracket allows easy access to each port for drop installation once installed.

PACKAGE CONTENTS

- A. Handhole Bracket
- B. Titan Bracket
- C. Mounting Hardware (Titan only)

RECOMMENDED TOOLS

- Safety Glasses
- 7/16 wrench, 216 tool or equivalent
- Drill (optional)

FIBER HANDLING GUIDELINES

⚠ Caution: Fiber optic cable is susceptible to damage from excessive bending, pulling or crushing forces. At every stage of the installation process ensure that the fiber bundles or loose buffer tubes are free from unintentional cuts, nick or bends to avoid potential fiber damage.

BRACKET INSTALLATION

Prior to bracket installation, insure there is clearance for the feeder cable and outgoing drops. Make sure there will be no pinch points or extreme bends for feeder or drops to be installed.

1. Level and mark 2 mounting holes for Mount Hanger Bracket “A” - 5” Center to Center.
2. Drill if needed for mounting hardware – *not supplied*.
3. Mount Hanger Bracket “A”, shown in figure 1.



Figure 1

4. Attach Titan Hanger Bracket “B” to Titan Multiport using supplied bolts and washers with the flat side of bracket “B” facing the Titan Multiport. See figure 2.



Figure 2

5. Secure bolts with 216 tool or 7/16” equivalent tool.
6. Hang Bracket “B” onto Bracket “A” as shown in Figure 3.



Figure 3