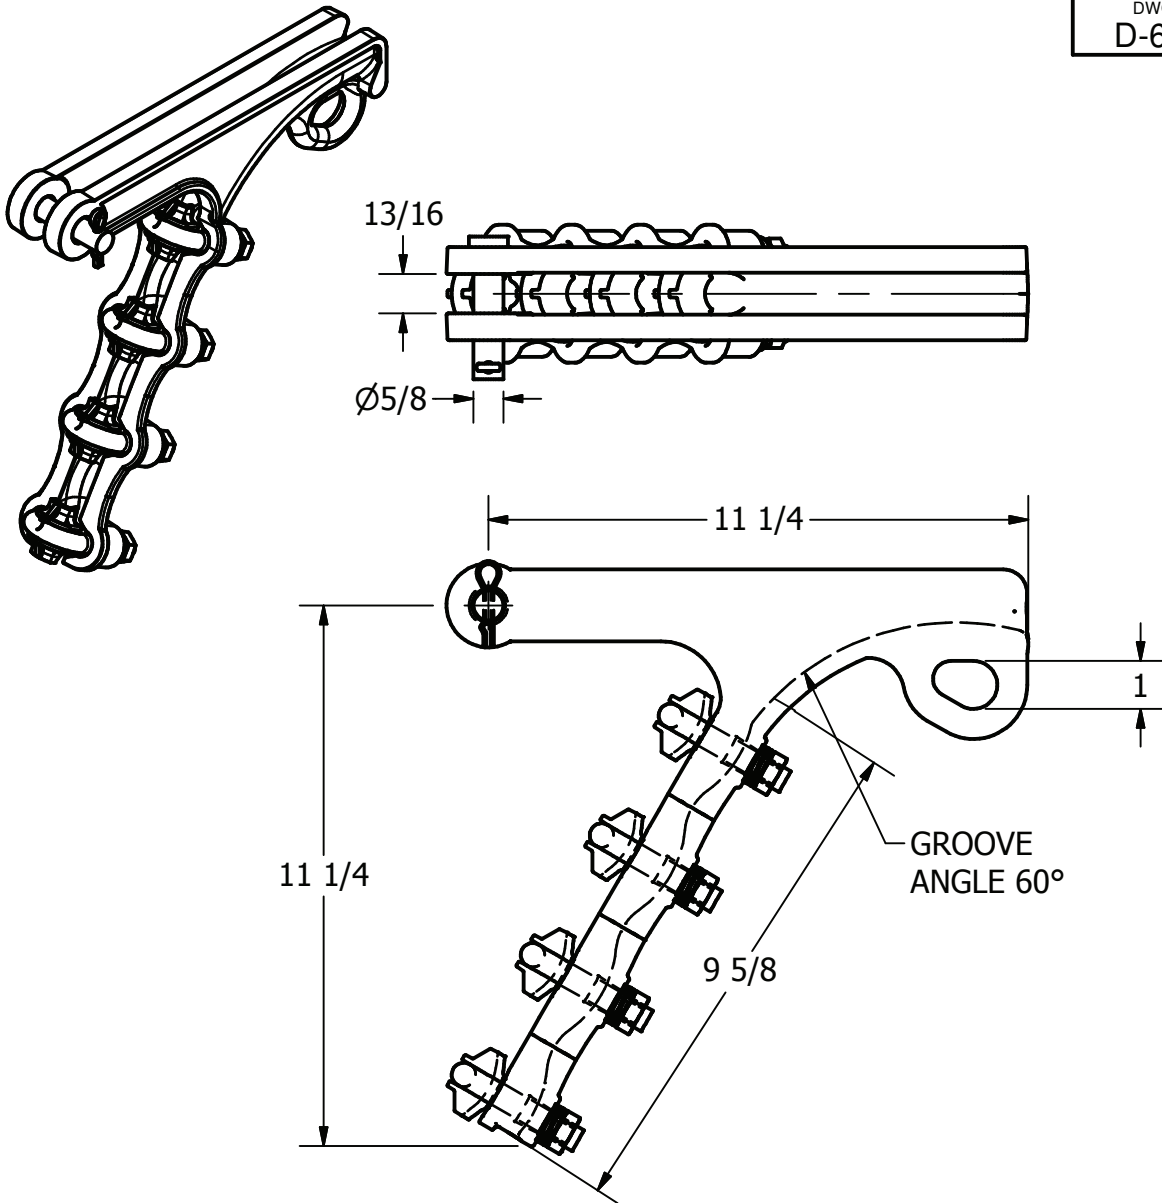


ITEM NO

DWG NO
D-6997MATERIAL

ALUMINUM BRONZE ASTM B30
U-BOLTS, NUTS, & LOCKWASHERS -
GALVANIZED HIGH STRENGTH STEEL
CLEVIS PIN-GALVANIZED STEEL
COTTER KEY-STAINLESS STEEL

11.66 LBS

CABLE RANGE

4/0 (.528 DIA) - 500 MCM(.814 DIA.)

NOTES:

1. MIN ULTIMATE STRENGTH LOAD: 40,000 LBS
2. WORKING LOAD: 15,300 LBS
3. U-BOLTS TO BE TORQUED TO 70 FT-LBS

LOCATION

CONTRACT NO

CUST / CONTR

REVISIONS

REV	DESCRIPTION	DATE	BY	APR
4	RE-DRAWN IN INVENTOR	2-29-10	LK	EP

DRN BY:
BB
DRN DATE:
1-3-91
CHK BY:
HJ
CHK DATE:
1-3-91

AFL**DOSSERT®**

CLAMP, STRAIN ANGLE 4/0 -500 MCM

REV
4

SECL50-H-4-RR

1 OF 1

THIS DRAWING AND ALL INFORMATION ON IT IS THE PROPERTY OF AFL. IT IS CONFIDENTIAL AND IT IS GIVEN TO YOU FOR A LIMITED PURPOSE AND MUST BE RETURNED UPON REQUEST. NEITHER THIS DRAWING OR ANY PART OF IT NOR ANY INFORMATION CONCERNING IT MAY BE COPIED, EXHIBITED, OR FURNISHED TO OTHERS NOR PHOTOGRAPHS TAKEN OF ANY ARTICLE FABRICATED OR ASSEMBLED FROM THE DRAWING WITHOUT THE CONSENT OF AFL.