

### DOSSERT®

#### TYPE Q2L, Q2L-E

##### Copper Service Tap Connector For Two Cables To Flat

Double tap lugs series are designed to fit NEMA two hole pads with two 9/16 inch holes on 1 3/4 inch center except the small sizes. Compact construction and two high strength clamp members reduce cantilever distance and increase pull out resistance of conductors.

##### Material



Copper Alloy

##### Hardware

Everdur nuts and lockwashers

##### Note

Type Q2L is for use with 1/4 inch bus bar. Type Q2L-E is for use with 1/2-3/4 inch bus bar.

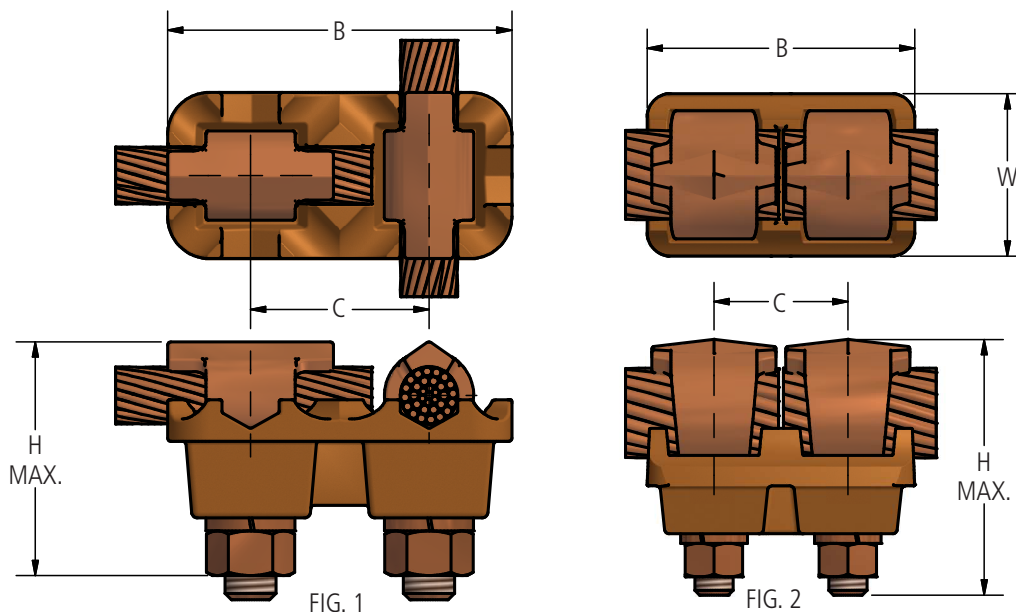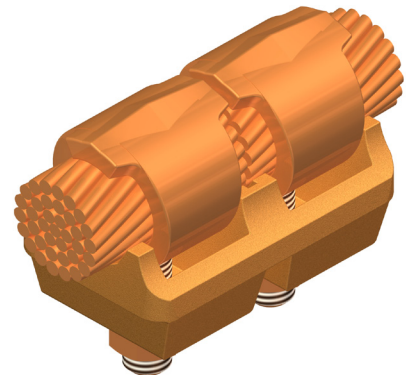

### Ordering Information

CATALOG NUMBER		CABLE RANGE		FIGURE NUMBER	DIMENSIONS IN INCHES				U-BOLT SIZE
		MIN	MAX		B	C	H MAXIMUM	W	
Q2L8	Q2L8E	10 Solid	#1 Stranded	1	2 1/4	1 1/4	1 15/16	1 1/8	3/8
Q2L13	Q2L13E	8 Solid	2/0 Stranded	1	2 3/8	1 1/4	2	1 1/4	3/8
Q2L13-50	Q2L13-50E	8 Solid	2/0 Stranded	1	3 1/8	1 3/4	2 1/4	1 1/2	1/2
Q2L25	Q2L25E	6 Solid	250 MCM	1	3 3/8	1 3/4	2 5/8	1 5/8	1/2
Q2L35	Q2L35E	2 Solid	350 MCM	1	3 1/2	1 3/4	2 3/4	1 3/4	1/2
Q2L50	Q2L50E	1/0 Solid	500 MCM	2	4	1 3/4	3 1/8	1 13/16	1/2
Q2L75	Q2L75E	350 MCM	750 MCM	2	4	1 3/4	3 1/4	1 7/8	1/2
Q2L100	Q2L100E	500 MCM	1000 MCM	2	4	1 3/4	3 3/8	2 1/8	1/2