


THIS DRAWING AND ALL INFORMATION ON IT IS THE PROPERTY OF AFL. IT IS CONFIDENTIAL AND IT IS GIVEN TO YOU FOR A LIMITED PURPOSE AND MUST BE RETURNED UPON REQUEST. NEITHER THIS DRAWING OR ANY PART OF IT NOR ANY INFORMATION CONCERNING IT MAY BE COPIED, EXHIBITED, OR FURNISHED TO OTHERS NOR PHOTOGRAPHS TAKEN OF ANY ARTICLE FABRICATED OR ASSEMBLED FROM THE DRAWING WITHOUT THE CONSENT OF AFL.

ITEM NO:

DWG. NO:

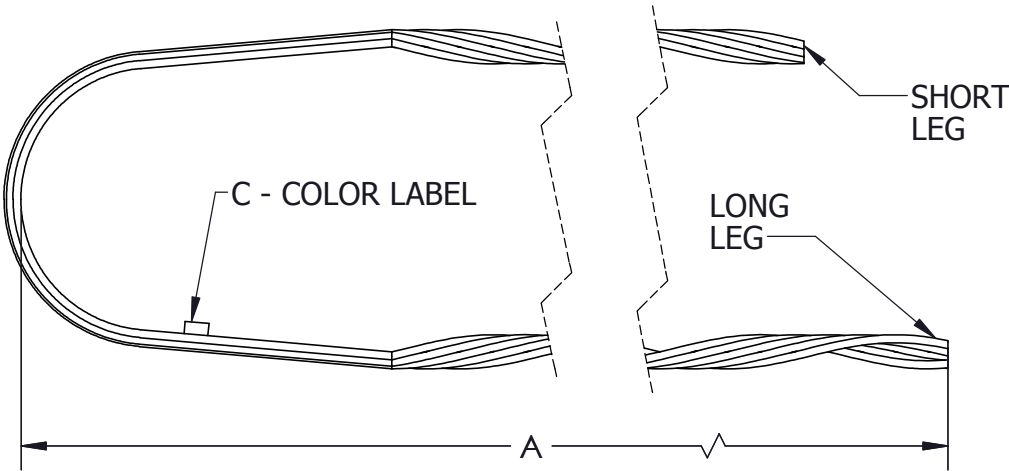

ITEM NO.	PART NO.	SIZE (IN)	STRAND CONSTRUCTION	ACTUAL DIAMETER (IN)	PER CARTON UNITS	PER CARTON WT/LBS	A	C	RATED HOLDING STRENGTH (LBS)	(PERCENT OF STRANDS RATED BREAKING STRENGTH)
	SDE-5100-SS304	1/8	7W	0.123	100	11	14	BLUE	1,830	-100%
	SDE-5101-SS304	3/16	7W	0.186	100	33	23	RED	3,990	-100%
	SDE-5102-SS304	1/4	3W, 7W	0.259, 0.240	50	25	27	YELLOW	6,650	-100%
	SDE-5103-SS304	9/32	7W	0.279	50	29	30	BLUE	8,950	-100%
	SDE-5104-SS304	5/16	3W, 7W	0.312, 0.312	50	41	33	BLACK	11,200	-100%
	SDE-5105-SS304	3/8	3W, 7W	0.356, 0.360	25	33	37	ORANGE	15,400	-100%
	SDE-5106-SS304	7/16	7W	0.435	25	47	40	GREEN	20,800	-100%
	SDE-5107-SS304	1/2	7W OR 19W	0.459 OR 0.500	20	63	49	BLUE	26,900	-100%
	SDE-5108-SS304	9/16	7W OR 19W	0.564 OR .565	10	48	55	YELLOW	35,000	-100%
	SDE-5109-SS304	5/8	7W OR 19W	0.621 OR 0.625	10	65	64	BLACK	7W 42,400 19W 40,200	(100%), (100%)
	SDE-5110-SS304	3/4	19W	0.75	5	54	76	ORANGE	58,300	-100%
	SDE-5111-SS304	7/8	19W	0.885	5	76	90	GREEN	79,700	-100%
	SDE-5112-SS304	1	19W OR 37W	1.000 OR 1.001	3	76	125	BLUE	19W 104,500 37W 92,430	(100%), (90%) +

MATERIAL:
STAINLESS STEEL, ANSI 304

LOCATION					CONTRACT NO		CUST / CONTR	
REVISIONS					DRN BY: HV		FAFL DOSSERT®	
REV	DESCRIPTION	DATE	BY	APR	DRN DATE: 11.23.13			
					CHK BY: JL	DEAD END, GUY GRIP, STAINLESS, TYPE 304		
					CHK DATE: 11.23.13			
					PA 2015.231.0	REV 0	PART NO: SDE-SERIES-SS304	1 OF 1