


FUSEConnect Connectors (SC, FC, LC, ST)

## FUSEConnect® Fusion-Spliced, Field Installable Connectors

AFL's FUSEConnect fusion-spliced, field installable connectors are uniquely designed and feature only four to five components. The factory pre-polished ferrule eliminates the need for polishing, adhesives, and crimping in the field, which minimises the potential for operator error and expensive connector scrap.

FUSEConnect utilises a fusion splicer to terminate the connector in the field, addressing return loss concerns present in analog optical networks. This advanced process yields true APC performance for SC/APC and LC/APC configurations. FUSEConnect is compatible with Fujikura fusion splicers and most other fibre holder-based fusion splicing platforms.

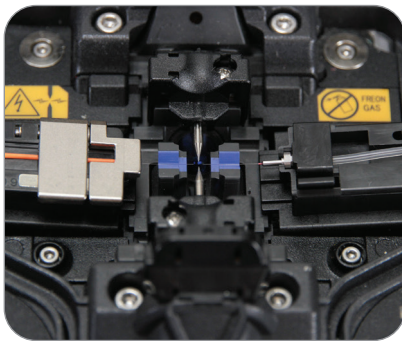

FUSEConnect in Fusion Splicer

### Features




- Field installable
- No adhesives, crimping or polishing
- True APC performance
- Compatible with most fusion splicers

### Applications

- Connectorisation in:
  - RF-overlay FTTN networks
  - Cable TV backbone networks
  - Outside plant
  - FTTD
  - MDU FTTN Cabling
- Central office connector replacement
- Data center installation

### Specifications

PARAMETER	VALUE
Connector Type	SC, LC, FC, ST
Cable Type	900 µm, 2 mm, 3 mm, 4.8 mm (SC only)
Polish	APC, UPC, PC
Insertion Loss	SM: 0.15 dB (average), 0.25 dB (maximum) / MM: 0.10 dB (average), 0.25 dB (maximum)
Return Loss	SM: ≤ -65 dB (APC), ≤ -55 dB (UPC) / MM: ≤ -35 dB (PC)

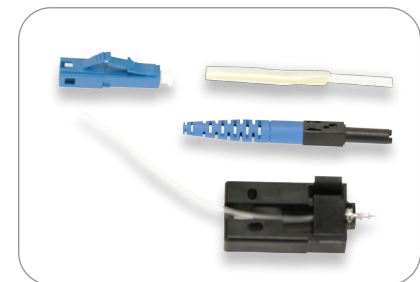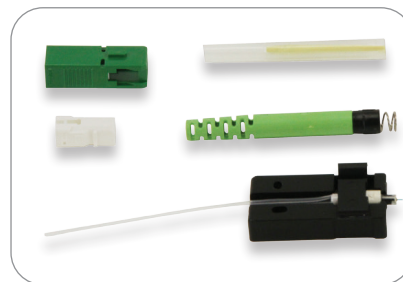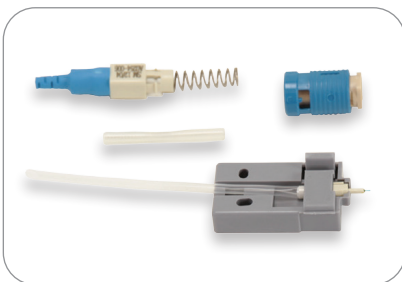

FUSEConnect Kits - ST (blue), SC (green), LC (blue)

## FUSEConnect® Fusion-Spliced, Field Installable Connectors

### Ordering Information

CONNECTOR TYPE	BOOT TYPE	AFL NO.*				
		UPC SM (Blue)	APC SM (Green)	PC 62.5 µm MM (Beige)	PC 50 µm MM (Black)	PC 50 µm LOMMF (AQUA)**
SC	900 µm	FUSE-SC9SMU-6	FUSE-SC9SMA-6	FUSE-SC9M62-6	FUSE-SC9M50-6	FUSE-SC9M50L-6
	3 mm	FUSE-SC3SMU-6	FUSE-SC3SMA-6	FUSE-SC3M62-6	FUSE-SC3M50-6	FUSE-SC3M50L-6
	4.8 mm	FUSE-SC48SMU-6	FUSE-SC48SMA-6	—	—	—
LC	900 µm	FUSE-LC9SMU-6	FUSE-LC9SMA-6	FUSE-LC9M62-6	FUSE-LC9M50-6	FUSE-LC9M50L-6
	2 mm	FUSE-LC2SMU-6	FUSE-LC2SMA-6	FUSE-LC2M62-6	FUSE-LC2M50-6	FUSE-LC2M50L-6
FC	900 µm	FUSE-FC9SMU-6	—	FUSE-FC9M62-6	FUSE-FC9M50-6	FUSE-FC9M50L-6
	2 mm	FUSE-FC2SMU-6	—	FUSE-FC2M62-6	FUSE-FC2M50-6	FUSE-FC2M50L-6
	3 mm	FUSE-FC3SMU-6	—	FUSE-FC3M62-6	FUSE-FC3M50-6	FUSE-FC3M50L-6
ST	900 µm	FUSE-ST9SMU-6	—	FUSE-ST9M62-6	FUSE-ST9M50-6	FUSE-ST9M50L-6
	2 mm	FUSE-ST2SMU-6	—	FUSE-ST2M62-6	FUSE-ST2M50-6	FUSE-ST2M50L-6
	3 mm	FUSE-ST3SMU-6	—	FUSE-ST3M62-6	FUSE-ST3M50-6	FUSE-ST3M50L-6

\* AFL NO. is for one pack of 6 pieces \*\* Laser Optimised MM Fibre (LOMMF) compatible with OM3 and OM4 fibres

### Temperature Specifications

TEMPERATURE RANGE	
Operating Temperature	-40°C to +75°C

**Contact AFL for further details.**